


Bismarck Series Ceiling Mount



| Model Number | Lamping Code      | Body Lamping      | Circuit | Finish | Diffuser | Mounting | Louver |
|--------------|-------------------|-------------------|---------|--------|----------|----------|--------|
| BM1008C      | GJT               | 4,800lm LED (27W) | 1       | PC     | WA<br>AG | CC       | SQ     |
|              | • W 12<br>• HT 10 |                   |         |        |          |          |        |
|              | AXP               | 2-100W A21 (200W) | 1       | PC     | WA<br>AG | CC       | SQ     |
| BM1309C      | GJM               | 4,800lm LED (27W) | 1       | PC     | WA<br>AG | CC       | SQ     |
|              | • W 15<br>• HT 11 |                   |         |        |          |          |        |
|              | AXR               | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | CC       | SQ     |
| BM1410C      | GJN               | 4,800lm LED (27W) | 1       | PC     | WA<br>AG | CC       | SQ     |
|              | • W 14<br>• HT 12 |                   |         |        |          |          |        |
|              | CWZ               | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | CC       | SQ     |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

|       |                                                         |
|-------|---------------------------------------------------------|
| Scale | Abbreviation Key                                        |
|       | Lamps                                                   |
|       | 100W A21      Medium Base, 100W Max, Incandesent or LED |
|       | Finish Types                                            |
|       | PC      Powder Coat                                     |
|       | Diffuser Types                                          |
|       | WA      Standard Acrylic Diffuser                       |

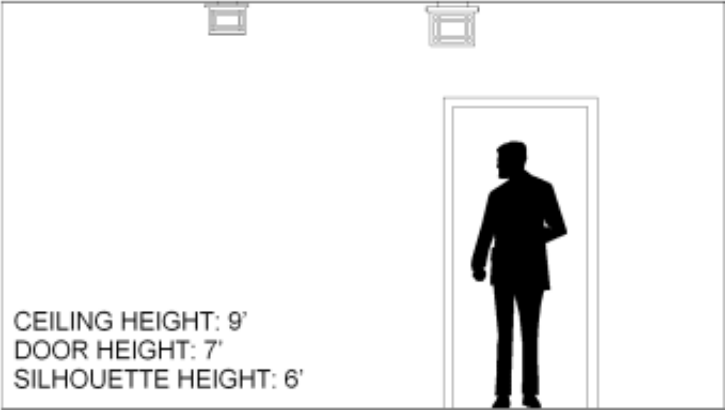

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

0 D1