


# **Bismarck Series Pendant**






Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
• W 12 • HT 25 • OAH 72 (OverAll Height)	FJE	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST SP	SQ
BM1326L  • W 15  • HT 27	GHI	15,600lm LED (88W)	7,100lm LED (51W)	2	PC	WA AG	ST SP	SQ
• OAH 96 (OverAll Height)	GHP	19,800lm LED (124W)	12,500lm LED (93W)	2	PC	WA AG	ST SP	SQ
	FJF	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST SP	SQ
BM1331L  • W 15  • HT 32	GKY	15,600lm LED (88W)	7,100lm LED (51W)	2	PC	WA AG	ST SP	SQ
• OAH 96 (OverAll Height)	DMR	24,000lm LED (150W)	12,500lm LED (93W)	2	PC	WA AG	ST SP	SQ
	FJG	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST SP	SQ
• W 16 • HT 37 • OAH 96 (OverAll Height)	DHH	24,600lm LED (141W)	12,500lm LED (93W)	2	PC	WA AG	ST SP	SQ
	GEJ	30,900lm LED (176W)	12,500lm LED (93W)	2	PC	WA AG	ST SP	SQ
	FJH	9-60W A19 (540W)	1-100W PAR38 (100W)	3	PC	WA AG	ST SP	SQ

BM1842L	DNJ	39,400lm LED (229W)	12,500lm LED (93W)	2	PC	WA AG	ST SP	SQ
• W 21 • HT 44								
• OAH 120 (OverAll Height)	FJI	12-MAX 45W LED Med. Base (540W)	1-100W A21 (100W)	2	PC	WA AG	ST SP	SQ

#### SAMPLE CATALOG NUMBER

## Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

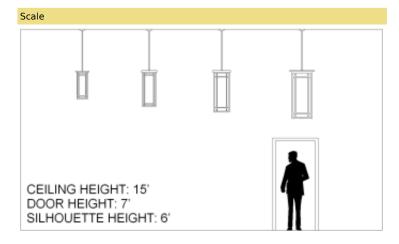

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

l a	m	n	S

60W A19 Medium Base, 60W Max, Incandesent or LED
100W PAR38 Medium Base, 100W Max, Incandesent or LED

MAX 45W LED 45W-LED A21, medium base

Med. Base

## Finish Types

PC Powder Coat

## **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

## Mountings

ST Stem

SP Steep Pitch Canopy for Stem

## Louvers

SQ Square Cell

# **Dimming Types**

0 D1 1 D2 2 D3