## **Bismarck Series Wall Bracket**






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
BM0816B • W 10 • HT 17 • EXT 11	АҮВ	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	BL
BM1020B • W 12 • HT 21 • EXT 13	AYD	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	BL
<b>BM1326B</b> • W 15	AYH	2-100W A21 (200W)	1	PC	WA AG	WM	SQ	BL

• W 15 • HT 27

• EXT 17

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

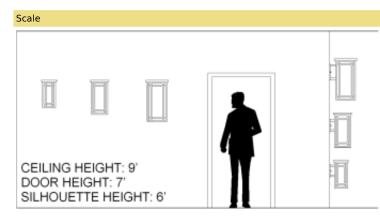

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)

## Abbreviation Key

Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	

WM Wall Mount

- Optional specialty diffuser materials available
  Energy efficient LED lamping
  High power factor electronic LED driver
  Wired for single circuit operation, Body Lamping
  Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
  Standard LED CRI is 80 contact us for alternate CRI availability
  Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
  Standard LED dimming is 0-10v
  Optional line voltage (Triac or ELV) LED dimming is available consult for

- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
  UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers	
SQ	Square Cell
Options	
BL	Bottom Lens