


Chandler Series Pendant



Model Number	Lamping Code	Down Lamping	Circuit	Finish	Mounting
CH0612L • W 6" • HT 12" • OAH 36" (OverAll Height)	FJJ	1-100W A21 (100W)	1	PC	ST CH SM SP AC
	ECZ	5,100lm LED (33W)	1	PC	ST CH SM SP AC
	DLR	7,100lm LED (47W)	1	PC	ST CH SM SP AC
	BXE	1-100W A21 (100W)	1	PC	ST CH SM SP AC
CH0820L • W 8" • HT 20" • OAH 36" (OverAll Height)	DPV	7,100lm LED (51W)	1	PC	ST CH SM SP AC
	EDL	10,400lm LED (76W)	1	PC	ST CH SM SP AC
	DPW	12,500lm LED (93W)	1	PC	ST CH SM SP AC

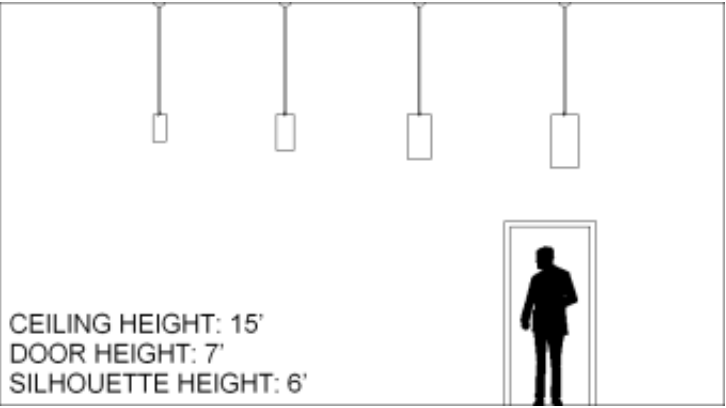

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Energy efficient LED lighting
- High power factor electronic LED driver
- Wired for single circuit operation, Down Lighting
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lighting is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lighting options.

Lamps	
100W A21	Medium Base, 100W Max, Incandescent or LED
Finish Types	
PC	Powder Coat
Mountings	
ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem
AC	Air Craft Cable

Dimming Types	
0	D1
1	D2
2	D3