

Cleveland Series Ceiling Mount






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
CL1007C • W 12 • HT 10	АНО	2-100W A21 (200W)	1	PC	WA	СС	SQ
CL1208C • W 14 • HT 11	GJJ	5,400lm LED (33W)	1	PC	WA	СС	SQ
	AHQ	3-100W A21 (300W)	1	PC	WA	CC	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

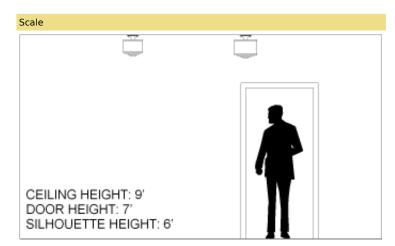

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED lamping
 High power factor electronic LED driver

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

Wired for single circuit operation, Body Lamping
Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
Standard LED CRI is 80 - contact us for alternate CRI availability
Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
Standard LED dimming is 0-10v
Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility. 0 1

D1 D2

compatibility

Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed

• Contact Us for more lamping options.