


A modern chandelier featuring a central black arm that branches out to support five gothic-style lanterns. Each lantern has a tall, arched, black metal frame with a white, translucent interior. The lanterns are arranged in a circular pattern around a central point. The base of each lantern is decorated with a small, illuminated cross-like symbol. The chandelier is suspended from a ceiling by a single black cord.

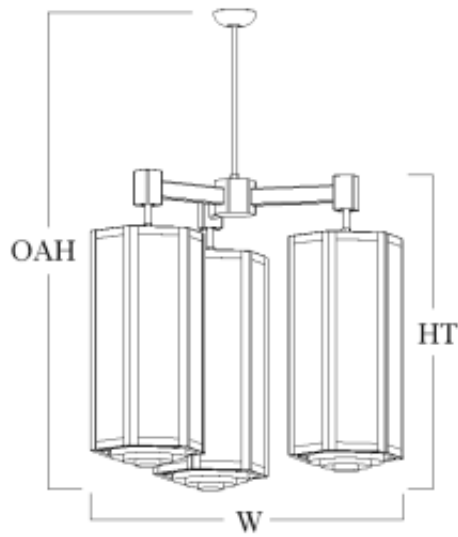

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
GV2724U • W 37 • HT 36 • OAH 96 (OverAll Height) • Y 3 @ 12"x29"	GCT	12-60W A19 (720W)	3-100W A21 (300W)	2	PC	WA AG	ST SP	SQ
GV3026U • W 42 • HT 39 • OAH 96 (OverAll Height) • Y 3 @ 14"x32"	DRI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA AG	ST SP	SQ
	DRK	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	GCU	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA AG	ST SP	SQ
GV3931U • W 53 • HT 45 • OAH 120 (OverAll Height) • Y 3 @ 16"x37"	DRL	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	DRM	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	DRN	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	GCW	18-60W A19 (1080W)	3-100W A19 (300W)	2	PC	WA AG	ST SP	SQ
GV4836U • W 63 • HT 51 • OAH 120 (OverAll Height) • Y 3 @ 18"x43"	GAE	53,600lm LED (298W)	15,500lm LED (108W)	2	PC	WA AG	ST SP	SQ

GAF	53,600lm LED (298W)	20,100lm LED (141W)	2	PC	WA AG	ST SP	SQ
FZY	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
FZZ	105,900lm LED (713W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
GCY	27-60W A19 (1620W)	3-100W A21 (300W)	3	PC	WA AG	ST SP	SQ

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

CEILING HEIGHT: 15'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key
Lamps
60W A19 Medium Base, 60W Max, Incandescent or LED
100W A21 Medium Base, 100W Max, Incandescent or LED
Finish Types
PC Powder Coat
Diffuser Types
WA Standard Acrylic Diffuser
AG Premium Glass Diffuser
Mountings
ST Stem
SP Steep Pitch Canopy for Stem
Louvers
SQ Square Cell
Dimming Types
0 D1
1 D2
2 D3