



Hampton Series 3-Arm Cluster Pendant

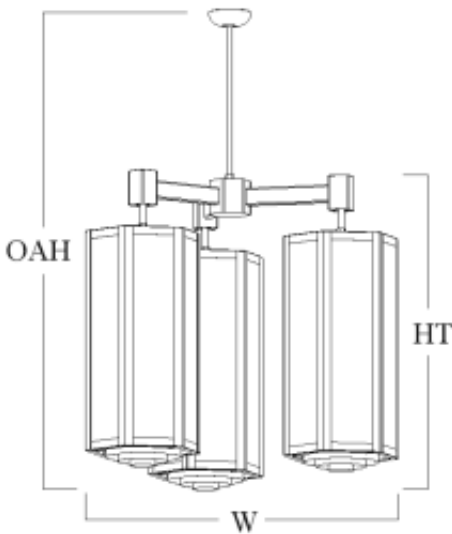

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA2724U • W 39 • HT 32 • OAH 96 (OverAll Height) • Y 3 @ 14"x24"	GCB	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
HA3026U • W 44 • HT 34 • OAH 96 (OverAll Height) • Y 3 @ 16"x26"	DQK	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	DQM	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	FKW	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
HA3931U • W 55 • HT 39 • OAH 120 (OverAll Height) • Y 3 @ 18"x31"	DQN	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	DQO	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	DQP	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	FKX	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
HA4836U • W 65 • HT 44 • OAH 120 (OverAll Height) • Y 3 @ 20"x36"	GAB	53,600lm LED (298W)	15,500lm LED (108W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	GAC	53,600lm LED (298W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	FYV	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	FYW	105,900lm LED (713W)	37,600lm LED (278W)	2	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO
	FKY	27-60W A19 (1620W)	3-100W A21 (300W)	3	PC	WT CT	WA AG	ST SP	SQ	SIL LOGO

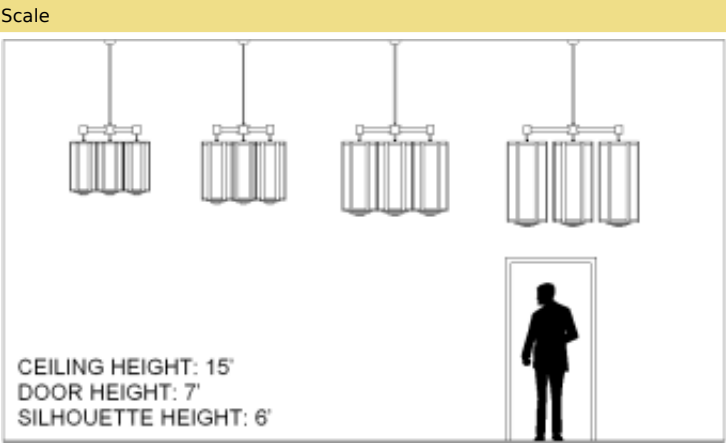

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key	
Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W A19	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Finish Accent Types	
WT	Wood Trim
CT	Custom Trim
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
ST	Stem
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D2
2	D3
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo