



Hampton Series 3-Tier Large Pendant

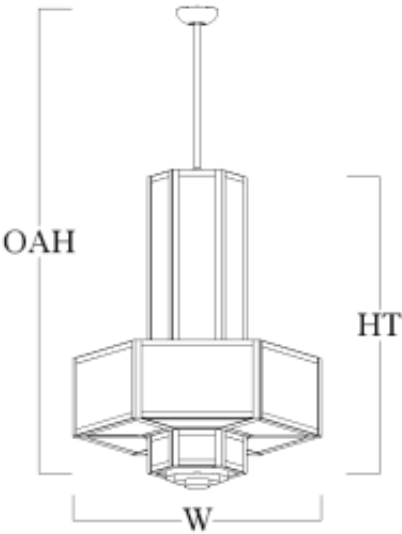

Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA3038H • W 32 • HT 38 • OAH 72 (OverAll Height)	GLG	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA3642H • W 38 • HT 40 • OAH 96 (OverAll Height)	DVO	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWD	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA4249H • W 44 • HT 48 • OAH 120 (OverAll Height)	EAU	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWC	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA4856H • W 50 • HT 56 • OAH 120 (OverAll Height)	ESP	25,700lm LED (159W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWM	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA5460H • W 54" • HT 60" • OAH 120" (OverAll Height)	FZD	27,800lm LED (132W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWE	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA6072H • W 60" • HT 72" • OAH 120" (OverAll Height)	GLR	27,800lm LED (146W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

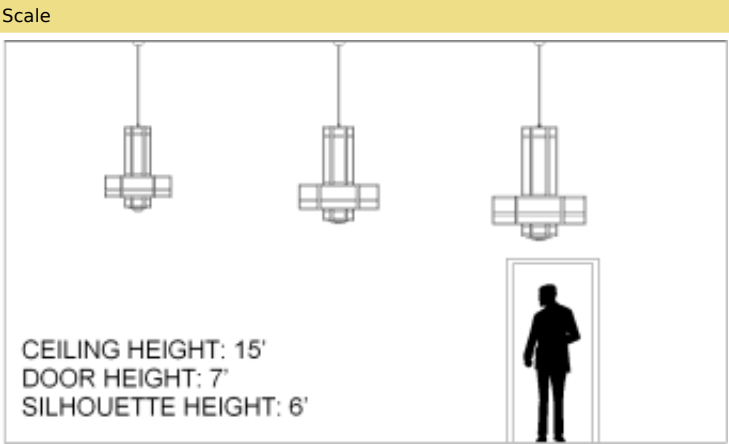

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key	
Lamps	
60W A19	Medium Base, 60W Max, Incandescent or LED
100W R40/Par38	Medium Base, 100W Max, Incandescent or LED
Finish Types	
PC	Powder Coat
Finish Accent Types	
WT	Wood Trim
CT	Custom Trim
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D3
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo