


Hampton Series 6-Arm Satellite Pendant

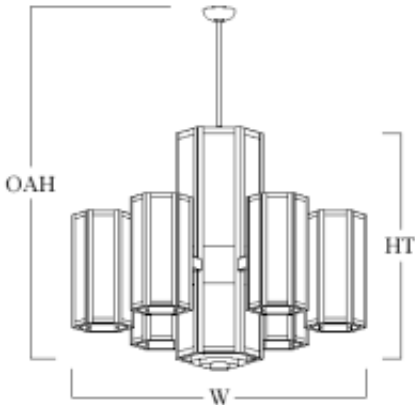

Model Number	Lamping Code	Body Lamping	Satellite Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA4836A	EIB	5-60W A19 (300W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
• W 50 • HT 36 • OAH 96 (OverAll Height) • X 1 @ 16"x36" • Y 6 @ 12"x20"											
HA6045A	EIC	9-60W A19 (540W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
• W 60" • HT 45" • OAH 120" (OverAll Height) • X 1 @ 16"x45" • Y 6 @ 12"x24"											
HA7254A	EID	12-60W A19 (720W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
• W 72" • HT 54" • OAH 120" (OverAll Height) • X 1 @ 18"x54" • Y 6 @ 14"x26"											

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
26W PAR38 LED	Medium Base, 26W Max, LED



PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lighting
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lighting, Down Lighting and Satellite Lighting
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lighting is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lighting options.

Finish Types	
PC	Powder Coat
Finish Accent Types	
WT	Wood Trim
CT	Custom Trim
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo