

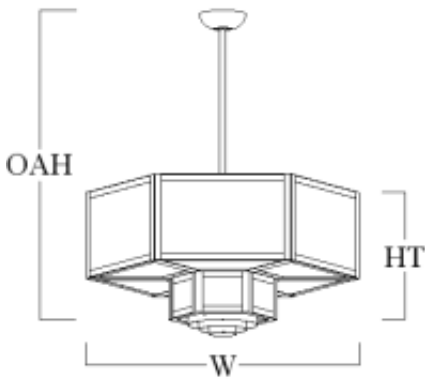


Hebron Series 2-Tier Large Pendant

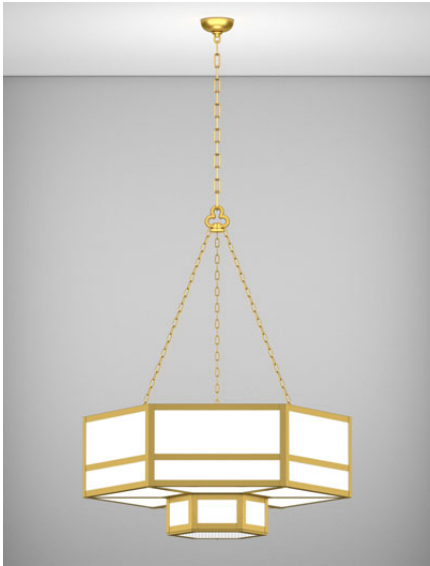

| Model Number                                                                | Lamping Code | Gallery Lamping     | Down Lamping            | Circuit | Finish | Diffuser | Mounting | Louver | Options     |
|-----------------------------------------------------------------------------|--------------|---------------------|-------------------------|---------|--------|----------|----------|--------|-------------|
| <b>HB2412W</b><br><br>• W 24"<br>• HT 12"<br>• OAH 48"<br>(OverAll Height)  | FYS          | 11,900lm LED (77W)  |                         | 1       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
|                                                                             | GLI          | 6-60W A19 (360W)    | 1-100W PAR38 (100W)     | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
| <b>HB3014W</b><br><br>• W 30"<br>• HT 14"<br>• OAH 72"<br>(OverAll Height)  | FYT          | 17,300lm LED (116W) |                         | 1       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
|                                                                             | GLJ          | 6-60W A19 (360W)    | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
| <b>HB3616W</b><br><br>• W 36"<br>• HT 16"<br>• OAH 96"<br>(OverAll Height)  | DVJ          | 35,200lm LED (216W) | 7,100lm LED (51W)       | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
|                                                                             | FWH          | 6-100W A21 (600W)   | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
| <b>HB4218W</b><br><br>• W 42"<br>• HT 18"<br>• OAH 96"<br>(OverAll Height)  | DZT          | 35,200lm LED (216W) | 12,500lm LED (93W)      | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
|                                                                             | FWI          | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
| <b>HB5422W</b><br><br>• W 54"<br>• HT 22"<br>• OAH 120"<br>(OverAll Height) | DVL          | 42,200lm LED (260W) | 12,500lm LED (93W)      | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |
|                                                                             | FWJ          | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     | SIL<br>LOGO |

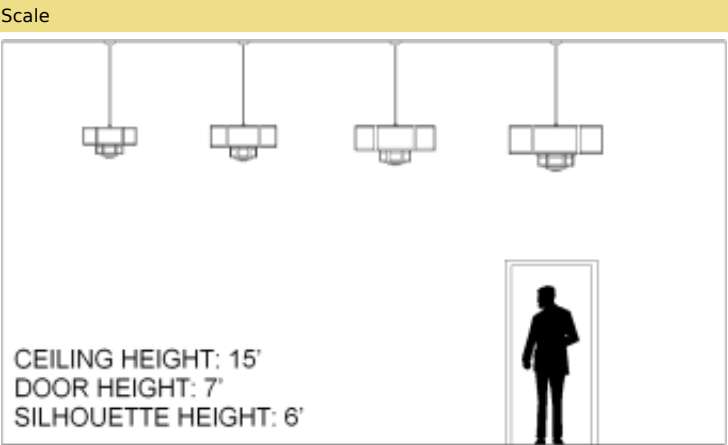

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| Abbreviation Key |                                            |
|------------------|--------------------------------------------|
| Lamps            |                                            |
| 60W A19          | Medium Base, 60W Max, Incandescent or LED  |
| 100W PAR38       | Medium Base, 100W Max, Incandescent or LED |
| Finish Types     |                                            |
| PC               | Powder Coat                                |
| Diffuser Types   |                                            |
| WA               | Standard Acrylic Diffuser                  |
| AG               | Premium Glass Diffuser                     |
| Mountings        |                                            |
| TC               | Triple Chain Spreader                      |
| Louvers          |                                            |
| SQ               | Square Cell                                |
| Dimming Types    |                                            |
| 0                | D1                                         |
| 1                | D2                                         |
| 2                | D3                                         |
| Options          |                                            |
| SIL              | Silhouette Symbol                          |
| LOGO             | Custom Logo                                |