
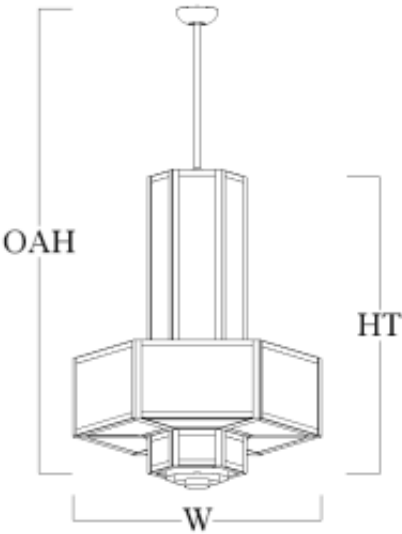


Hebron Series 3-Tier Large Pendant

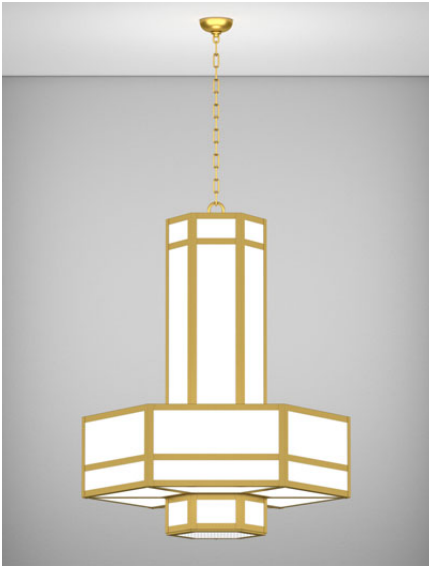


Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HB3038H - W 30" - HT 38" - OAH 72" (OverAll Height)	GLG	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
HB3642H - W 36" - HT 40" - OAH 96" (OverAll Height)	DVO	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWD	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HB4249H - W 42" - HT 49" - OAH 120" (OverAll Height)	EAU	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWC	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HB4856H - W 48" - HT 56" - OAH 120" (OverAll Height)	ESP	25,700lm LED (159W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWM	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HB5460H - W 54" - HT 60" - OAH 120" (OverAll Height)	FZD	27,800lm LED (132W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWE	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HB6072H - W 60" - HT 72" - OAH 120" (OverAll Height)	GLR	27,800lm LED (146W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

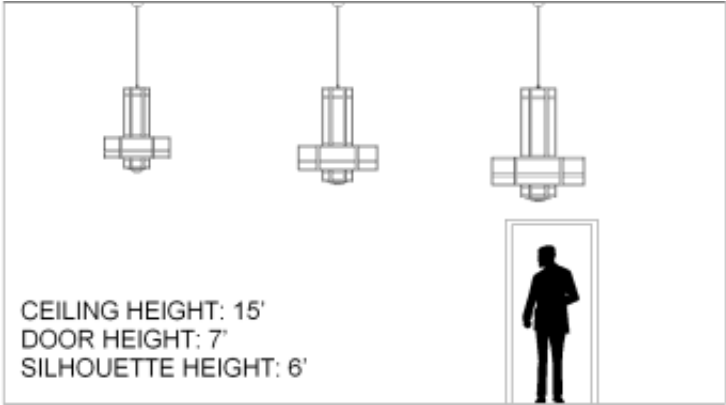

Abbreviation Key

Lamps

60W A19

Medium Base, 60W Max, Incandescent or LED

100W R40/Par38

Medium Base, 100W Max, Incandescent or LED

Finish Types

PC

Powder Coat

Diffuser Types

WA

Standard Acrylic Diffuser

AG

Premium Glass Diffuser

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Mountings

ST

Stem

CH

Chain

SP

Steep Pitch Canopy for Stem

Louvers

SQ

Square Cell

Dimming Types

0

D1

1

D3

Options

SIL

Silhouette Symbol

LOGO

Custom Logo