


Hebron Series Short Pendant

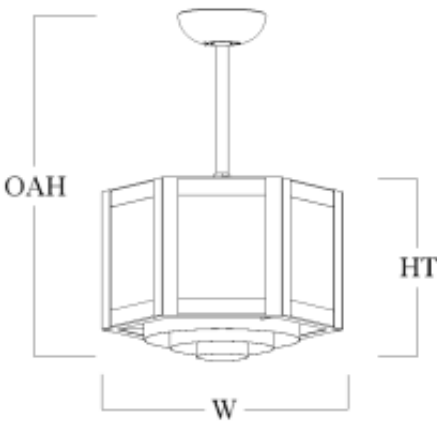


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HB1207P • W 12" • HT 7" • OAH 48" (OverAll Height)	ABL	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HB1408P • W 14" • HT 8" • OAH 48" (OverAll Height)	GGP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	ABN	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HB1609P • W 16" • HT 9" • OAH 48" (OverAll Height)	GG5	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	ABP	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HB1610P • W 16" • HT 10" • OAH 48" (OverAll Height)	GKP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	GKO	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HB1811P • W 18" • HT 11" • OAH 48" (OverAll Height)	GGT	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	ABR	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HB2208P • W 22" • HT 8" • OAH 48" (OverAll Height)	ENE	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

ENF	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
GIT	6-60W A19 (360W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

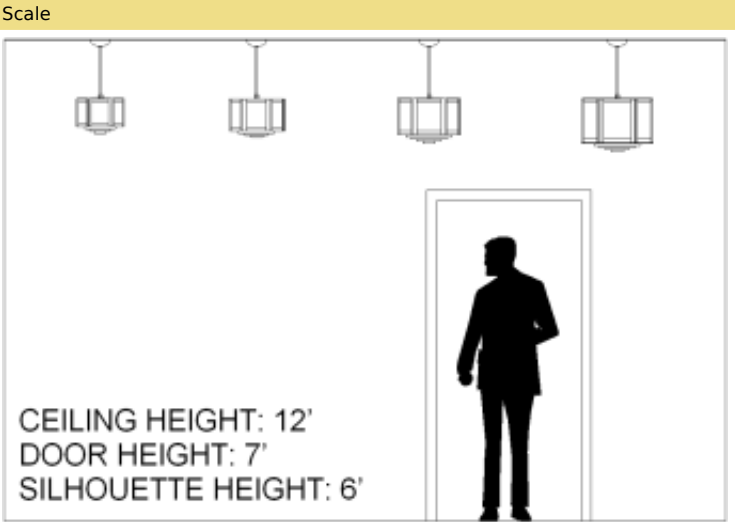

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 100W A21 Medium Base, 100W Max, Incandesent or LED
- 60W A19 Medium Base, 60W Max, Incandesent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- WA Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

- 0 D1
- 1 D2
- 2 D3

Options

- SIL Silhouette Symbol
- LOGO Custom Logo