



Hancock Series Short Pendant

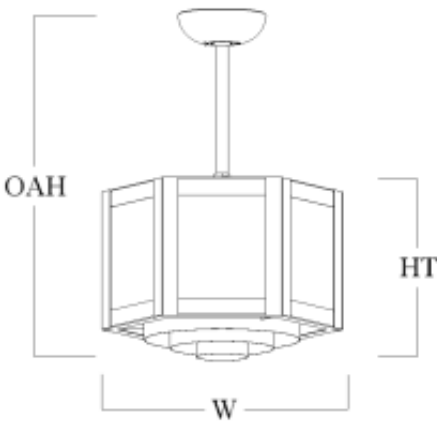

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HC1207P • W 12 • HT 9 • OAH 48 (OverAll Height)	AMQ	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HC1408P • W 14 • HT 10 • OAH 48 (OverAll Height)	GGU	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMS	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HC1609P • W 16 • HT 11 • OAH 48 (OverAll Height)	GFE	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMU	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HC1811P • W 18 • HT 14 • OAH 48 (OverAll Height)	GFF	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMW	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
HC2208P • W 22 • HT 10 • OAH 48 (OverAll Height)	FXR	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FYZ	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

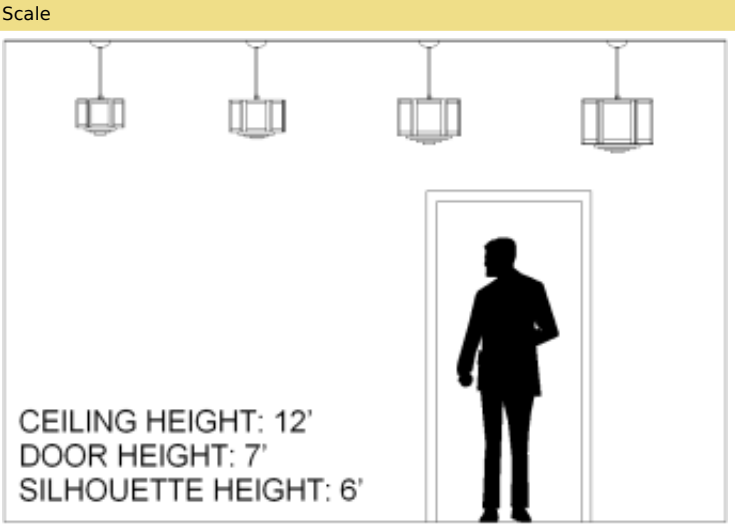

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key	
Lamps	
100W A21	Medium Base, 100W Max, Incandescent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D2
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo