


Hancock Series Wall Sconce



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HC0816S • W 8 • HT 17 • EXT 4	DYP	1,000lm LED (5W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DYQ	2,200lm LED (14W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ANG	1-60W A19 (60W)	1	PC	WA AG	WM	BD	SIL LOGO BL
HC1020S • W 10 • HT 21 • EXT 5	DYR	2,200lm LED (14W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DYS	3,800lm LED (22W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ANI	2-100W A21 (200W)	1	PC	WA AG	WM	BD	SIL LOGO BL
HC1224S • W 12 • HT 26 • EXT 6	FEF	6,300lm LED (40W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	FEG	7,100lm LED (44W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	FEE	3-100W A21 (300W)	1	PC	WA AG	WM	BD	SIL LOGO BL
HC1426S • W 14 • HT 28 • EXT 7	DYV	6,300lm LED (40W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DDX	8,200lm LED (53W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ANN	3-100W A21 (300W)	1	PC	WA AG	WM	BD	SIL LOGO BL

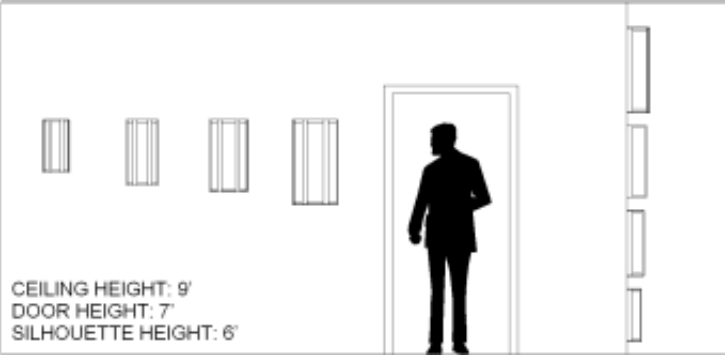

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard electrical junction box (by others)
- LED Battery Back-Up Available
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
WM	Wall Mount
Louvers	
BD	Bottom Perf Door
Dimming Types	
0	D1
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens
BD	Bottom Door