


Hammond Series 2-Tier Large Pendant

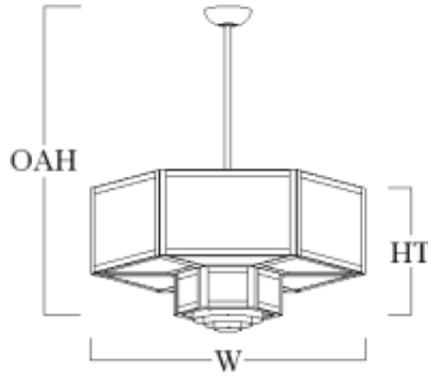


Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HD2412W • W 24 • HT 15 • OAH 48 (OverAll Height)	GFK	11,900lm LED (77W)		1	PC	WA AG	TC	SQ	SIL LOGO
	GLK	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	SIL LOGO
HD3014W • W 30 • HT 18 • OAH 72 (OverAll Height)	GFP	18,700lm LED (135W)		1	PC	WA AG	TC	SQ	SIL LOGO
	GLL	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	SIL LOGO
HD3616W • W 36 • HT 20 • OAH 96 (OverAll Height)	DWC	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	TC	SQ	SIL LOGO
	DJP	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	SIL LOGO
HD4218W • W 42 • HT 23 • OAH 96 (OverAll Height)	DWF	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ	SIL LOGO
	DJQ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	SIL LOGO
HD5422W • W 54 • HT 28 • OAH 120 (OverAll Height)	EYG	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ	SIL LOGO
	EYJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

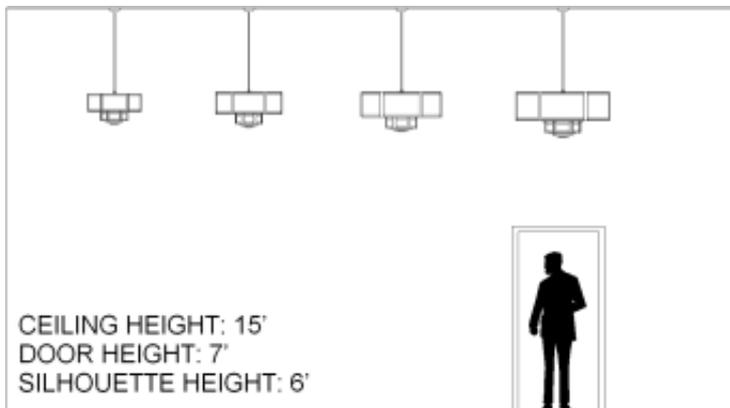

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandescent or LED
100W R40/Par38	Medium Base, 100W Max, Incandescent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

TC	Triple Chain Spreader
----	-----------------------

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
---	----

Options

SIL	Silhouette Symbol
LOGO	Custom Logo