



Hammond Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HD1207C	AMY	2-100W A21 (200W)	1	PC	WA AG	CC	SQ	SIL LOGO
• W 12" • HT 10"								
HD1408C	ANA	3-100W A21 (300W)	1	PC	WA AG	CC	SQ	SIL LOGO
• W 14" • HT 11"								
HD1609C	GFC	5,400lm LED (33W)	1	PC	WA AG	CC	SQ	SIL LOGO
	ANC	3-100W A21 (300W)	1	PC	WA AG	CC	SQ	SIL LOGO
HD1811C	GFD	5,400lm LED (33W)	1	PC	WA AG	CC	SQ	SIL LOGO
	ANE	3-100W A21 (300W)	1	PC	WA AG	CC	SQ	SIL LOGO
HD2208C	FYA	9,700lm LED (58W)	1	PC	WA AG	CC	SQ	SIL LOGO
• W 22 • HT 11								

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	

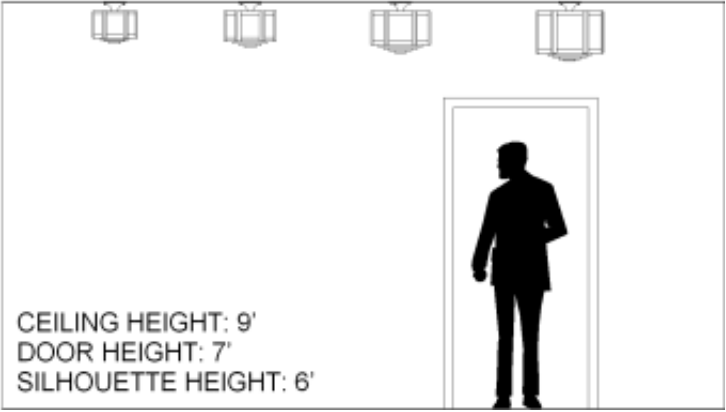

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

CC	Ceiling Canopy
----	----------------

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2

Options

SIL	Silhouette Symbol
LOGO	Custom Logo