



Hammond Series Wall Sconce

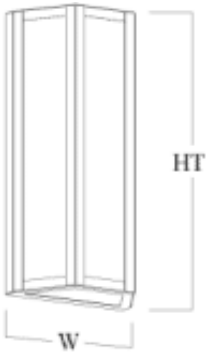

| Model Number                                                                                   | Lamping Code | Body Lamping      | Circuit | Finish | Diffuser | Mounting | Louver | Options     |
|------------------------------------------------------------------------------------------------|--------------|-------------------|---------|--------|----------|----------|--------|-------------|
| HD0816S <ul style="list-style-type: none"><li>• W 8</li><li>• HT 17</li><li>• EXT 4</li></ul>  | DYP          | 1,000lm LED (5W)  | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | DYQ          | 2,200lm LED (14W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | ANG          | 1-60W A19 (60W)   | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
| HD1020S <ul style="list-style-type: none"><li>• W 10</li><li>• HT 21</li><li>• EXT 5</li></ul> | DYR          | 2,200lm LED (14W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | DYS          | 3,800lm LED (22W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | ANI          | 2-100W A21 (200W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
| HD1224S <ul style="list-style-type: none"><li>• W 12</li><li>• HT 26</li><li>• EXT 6</li></ul> | FEF          | 6,300lm LED (40W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | FEG          | 7,100lm LED (44W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | FEE          | 3-100W A21 (300W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
| HD1426S <ul style="list-style-type: none"><li>• W 14</li><li>• HT 28</li><li>• EXT 7</li></ul> | DYV          | 6,300lm LED (40W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | DDX          | 8,200lm LED (53W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |
|                                                                                                | ANN          | 3-100W A21 (300W) | 1       | PC     | WA AG    | WM       | BD     | SIL LOGO BL |

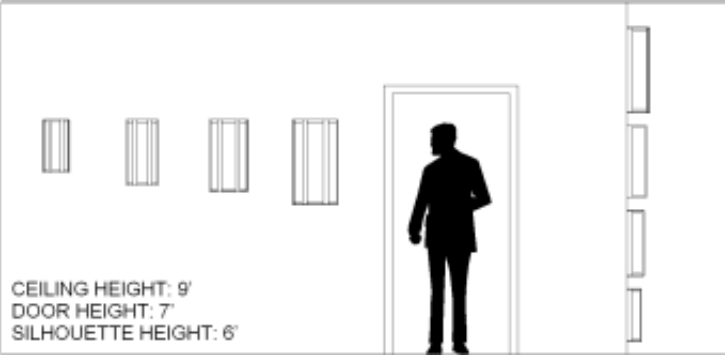

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| Lamps          |                                            |
|----------------|--------------------------------------------|
| 60W A19        | Medium Base, 60W Max, Incandescent or LED  |
| 100W A21       | Medium Base, 100W Max, Incandescent or LED |
| Finish Types   |                                            |
| PC             | Powder Coat                                |
| Diffuser Types |                                            |
| WA             | Standard Acrylic Diffuser                  |
| AG             | Premium Glass Diffuser                     |
| Mountings      |                                            |
| WM             | Wall Mount                                 |
| Louvers        |                                            |
| BD             | Bottom Perf Door                           |
| Dimming Types  |                                            |
| 0              | D1                                         |
| Options        |                                            |
| SIL            | Silhouette Symbol                          |
| LOGO           | Custom Logo                                |
| BL             | Bottom Lens                                |
| BD             | Bottom Door                                |