



## Hartford Series 2 Tier Large Pendant

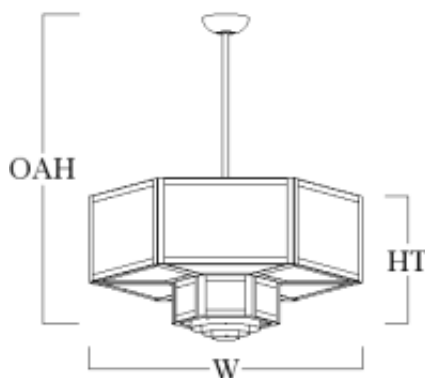

SAMPLE CATALOG NUMBER  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

| Model        | Lamping Options |                   |                     |                     |         |         |        |        |         |          |         |            |     |      |    |     |     |
|--------------|-----------------|-------------------|---------------------|---------------------|---------|---------|--------|--------|---------|----------|---------|------------|-----|------|----|-----|-----|
| Model Number | Lamping Code    | Body2 Lamping     | Gallery Lamping     | Down Lamping        | Voltage | Circuit | Finish | Louver | Hanging | Diffuser | Options | Dimensions |     |      |    |     |     |
| HF2412W      | ACU             |                   | 6-F32TBX (221W)     | 1-F42TBX (50W)      | 120/277 | 2       | PC     | CR     | CH      | AD       | DM      | W          | 24" |      |    |     |     |
|              | ACT             |                   | 6-100A19 (600W)     | 1-300R40 (300W)     | 120     | 2       |        |        |         |          |         | SS         | AG  | LOGO | HT | 14" | OAH |
| HF3014W      | ACW             |                   | 6-F42TBX (290W)     | 1-F42TBX (50W)      | 120/277 | 2       | PC     | CR     | CH      | AD       | DM      | W          | 30" |      |    |     |     |
|              | ACV             |                   | 6-150A21 (900W)     | 1-300R40 (300W)     | 120     | 2       |        |        |         |          |         | SS         | AG  | LOGO | HT | 16" | OAH |
| HF3616W      | DVK             | 2,400lm LED (18W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2       | PC     | CR     | CH      | AD       | DM      | W          | 36" |      |    |     |     |
|              | ACY             |                   | 6-F57QBX (394W)     | 1-F70QBX (81W)      | 120/277 | 2       |        |        |         |          |         | SS         | AG  | LOGO | HT | 19" |     |
|              | DFT             |                   | 6-200A21 (1200W)    | 1-300R40 (300W)     | 120     | 2       |        |        |         |          |         | GA         | SBL | OAH  | 8" |     |     |
| HF4218W      | DZT             | 2,400lm LED (18W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2       | PC     | CR     | CH      | AD       | DM      | W          | 42" |      |    |     |     |
|              | ADB             |                   | 12-F42TBX (580W)    | 2-F70QBX (161W)     | 120/277 | 2       |        |        |         |          |         | SS         | AG  | LOGO | HT | 21" |     |
|              | EIS             |                   | 12-150A21 (1800W)   | 1-300R40 (300W)     | 120     | 2       |        |        |         |          |         | GA         | SBL | OAH  | 8" |     |     |
| HF5422W      | DVL             | 4,200lm LED (34W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2       | PC     | CR     | CH      | AD       | DM      | W          | 54" |      |    |     |     |
|              | EIR             |                   | 12-150A21 (1800W)   | 1-300R40 (300W)     | 120     | 2       |        |        |         |          |         | SS         | AG  | LOGO | HT | 22" | OAH |

### Scale

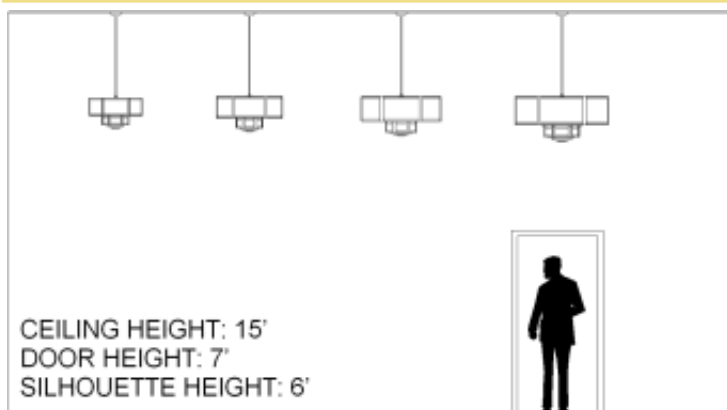

### Abbreviation Key

#### Dimensions

|     |                |
|-----|----------------|
| W   | Width          |
| HT  | Height         |
| OAH | Overall Height |

#### Lamp Descriptions

|        |                       |
|--------|-----------------------|
| 100A19 | 100W A19, medium base |
| 150A21 | 150W A21, medium base |
| 200A21 | 200W A21, medium base |
| 300R40 | 300W R40, medium base |

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for two circuit operation (Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

|        |                                     |
|--------|-------------------------------------|
| F32TBX | 32W triple biax, 4-PIN GX24q-3 base |
| F42TBX | 42W triple biax, 4-PIN GX24q-4 base |
| F57QBX | 57W quad biax, 4-PIN GX24q-5 base   |
| F70QBX | 70W quad biax, 4-PIN GX24q-6 base   |
| LED    | 3000 Kelvin Warm White LED          |

### Finishes

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

### Hanging Style

|    |             |
|----|-------------|
| SS | SINGLE STEM |
| CH | CHAIN       |

### Diffusers

|    |                                  |
|----|----------------------------------|
| AD | Acrylic (White Acrylic Standard) |
| AG | Art Glass                        |
| GA | Glass Alternative                |

### Options

|         |                                 |
|---------|---------------------------------|
| DM      | Dimming                         |
| DIM-010 | 0-10V four wire control dimming |
| SBL     | Symbol                          |
| LOGO    | Custom Logo                     |

### Louver

|    |  |
|----|--|
| CR | CONCENTRIC RING (Not available on LED lamping) |
|----|--|