



Hartford Series 2 Tier Large Pendant

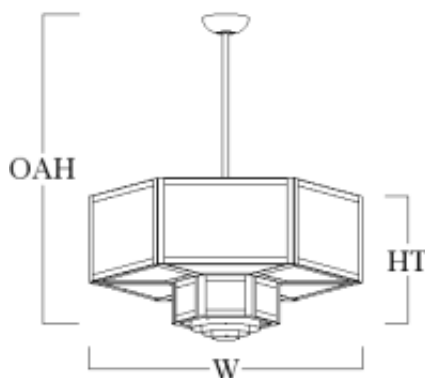

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

| Model | Lamping Options | | | | | | | | | | | | Dimensions | | | | |
|--------------|-----------------|-------------------|---------------------|---------------------|---------|---------|--------|--------|---------|----------|---------|------------|------------|-----|------|-----|-----|
| Model Number | Lamping Code | Body2 Lamping | Gallery Lamping | Down Lamping | Voltage | Circuit | Finish | Louwer | Hanging | Diffuser | Options | Dimensions | | | | | |
| HF2412W | ACU | | 6-F32TBX (221W) | 1-F42TBX (50W) | 120/277 | 2 | PC | CR | CH | AD | DM | W | 24" | | | | |
| | ACT | | 6-100A19 (600W) | 1-300R40 (300W) | 120 | 2 | | | | | | AG | HT | 14" | LOGO | OAH | 4" |
| HF3014W | ACW | | 6-F42TBX (290W) | 1-F42TBX (50W) | 120/277 | 2 | PC | CR | CH | AD | DM | W | 30" | | | | |
| | ACV | | 6-150A21 (900W) | 1-300R40 (300W) | 120 | 2 | | | | | | AG | HT | 16" | LOGO | OAH | 6" |
| HF3616W | DVK | 2,400lm LED (18W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2 | PC | CR | CH | AD | DM | W | 36" | | | | |
| | ACY | | 6-F57QBX (394W) | 1-F70QBX (81W) | 120/277 | 2 | | | | | | AG | HT | 19" | LOGO | OAH | 8" |
| | DFT | | 6-200A21 (1200W) | 1-300R40 (300W) | 120 | 2 | | | | | | AG | HT | 19" | LOGO | OAH | 8" |
| HF4218W | DZT | 2,400lm LED (18W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2 | PC | CR | CH | AD | DM | W | 42" | | | | |
| | ADB | | 12-F42TBX (580W) | 2-F70QBX (161W) | 120/277 | 2 | | | | | | AG | HT | 21" | LOGO | OAH | 8" |
| | EIS | | 12-150A21 (1800W) | 1-300R40 (300W) | 120 | 2 | | | | | | AG | HT | 21" | LOGO | OAH | 8" |
| HF5422W | DVL | 4,200lm LED (34W) | 26,700lm LED (256W) | 12,000lm LED (100W) | 120/277 | 2 | PC | CR | CH | AD | DM | W | 54" | | | | |
| | EIR | | 12-150A21 (1800W) | 1-300R40 (300W) | 120 | 2 | | | | | | AG | HT | 22" | LOGO | OAH | 10" |

Scale

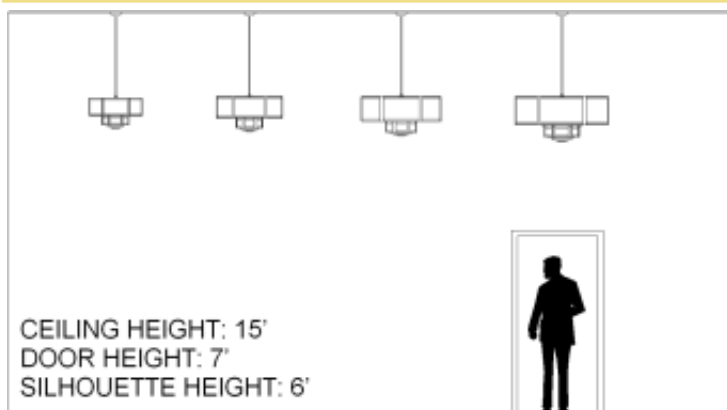

Abbreviation Key

Dimensions

| | |
|-----|----------------|
| W | Width |
| HT | Height |
| OAH | Overall Height |

Lamp Descriptions

| | |
|--------|-----------------------|
| 100A19 | 100W A19, medium base |
| 150A21 | 150W A21, medium base |
| 200A21 | 200W A21, medium base |
| 300R40 | 300W R40, medium base |

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for two circuit operation (Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| | |
|--------|-------------------------------------|
| F32TBX | 32W triple biax, 4-PIN GX24q-3 base |
| F42TBX | 42W triple biax, 4-PIN GX24q-4 base |
| F57QBX | 57W quad biax, 4-PIN GX24q-5 base |
| F70QBX | 70W quad biax, 4-PIN GX24q-6 base |
| LED | 3000 Kelvin Warm White LED |

Finishes

| | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Hanging Style

| | |
|----|-------------|
| SS | SINGLE STEM |
| CH | CHAIN |

Diffusers

| | |
|----|----------------------------------|
| AD | Acrylic (White Acrylic Standard) |
| AG | Art Glass |
| GA | Glass Alternative |

Options

| | |
|---------|---------------------------------|
| DM | Dimming |
| DIM-010 | 0-10V four wire control dimming |
| SBL | Symbol |
| LOGO | Custom Logo |

Louver

| | |
|----|--|
| CR | CONCENTRIC RING (Not available on LED lamping) |
|----|--|