


## Hartford Series Pendant

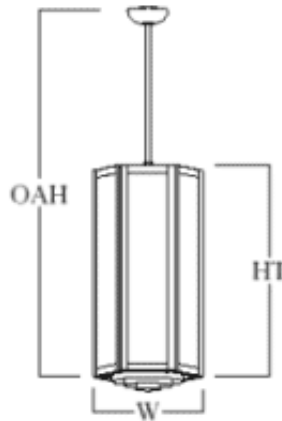

SAMPLE CATALOG NUMBER  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options


Model	Lamping Options													
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions			
HF1222L	AAF	2-F39BX (77W)	1-F70QBX (81W)	120/277	2	PC	CR	CH	AD	DIM-010	W	12"		
	AAD	3-100A19 (300W)	1-300R40 (300W)	120	2						AG	HT	24"	
HF1426L	DFB	12,700lm LED (99W)	7,000lm LED (53W)	120/277	2	PC	CR	CH	AD	DIM-010	W	14"		
	DVG	12,700lm LED (99W)	5,000lm LED (38W)	120/277	2						AG	HT	29"	
	DFJ	18,500lm LED (148W)	12,000lm LED (100W)	120/277	2						GA	DM	OAH	8'
	AAH	4-F39BX (156W)	1-F70QBX (81W)	120/277	2						LOGO	SBL		
	DHI	6-100A19 (600W)	1-300R40 (300W)	120	2									
HF1631L	DFA	12,700lm LED (99W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	16"		
	DLX	18,500lm LED (148W)	12,000lm LED (100W)	120/277	2						AG	HT	34"	
	DCR	22,900lm LED (202W)	12,000lm LED (100W)	120/277	2						GA	DM	OAH	8'
	AAK	4-F40BX (154W)	2-F70QBX (161W)	120/277	2						LOGO	SBL		
	AAM	6-F40BX (231W)	2-F70QBX (161W)	120/277	2									
	AAO	8-F40BX (308W)	2-F70QBX (161W)	120/277	2									
	DHJ	6-100A19 (600W)	1-300R40 (300W)	120	2									
HF1836L	DDL	19,000lm LED (148W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	18"		
	DNS	25,400lm LED (197W)	12,000lm LED (100W)	120/277	2						AG	HT	40"	
	AAR	4-F40BX (154W)	2-F70QBX (161W)	120/277	2						GA	DM	OAH	10'
	AAT	6-F40BX (231W)	2-F70QBX (161W)	120/277	2						LOGO	SBL		
	AAV	8-F40BX (308W)	2-F70QBX (161W)	120/277	2									
	DHK	9-100A19 (900W)	1-300R40 (300W)	120	2									
HF2242L	DNF	30,500lm LED (269W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	22"		
	ABB	6-F40BX (231W)	3-F70QBX (242W)	120/277	2						AG	HT	46"	
	ABE	8-F40BX (327W)	3-F70QBX (242W)	120/277	2						GA	DM	OAH	10'
	ABK	12-F40BX (461W)	3-F70QBX (242W)	120/277	2						LOGO	SBL		
	DHL	12-100A19 (1200W)	1-300R40 (300W)	120	3									

Scale

Abbreviation Key

Dimensions

W Width  
HT Height  
OAH Overall Height

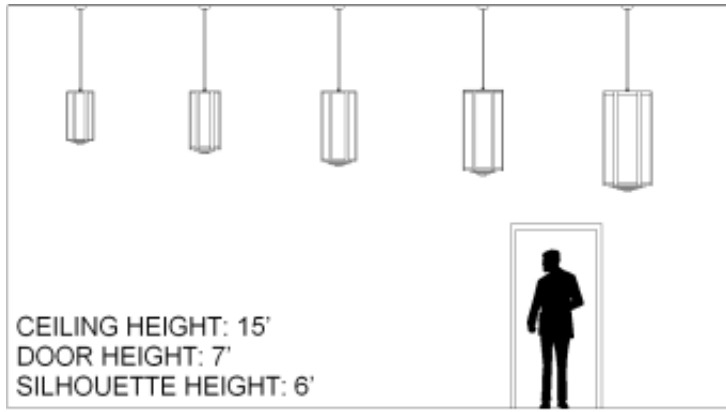

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Lamp Descriptions

100A19	100W A19, medium base
300R40	300W R40, medium base
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

## Finishes

PC	Powder Coat
----	-------------

## Hanging Style

SS	SINGLE STEM
CH	CHAIN

## Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass
GA	Glass Alternative

## Options

DM	Dimming
DIM-010	0-10V four wire control dimming
SBL	Symbol
LOGO	Custom Logo

## Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)