



Hagerstown Series 2-Tier Large Pendant

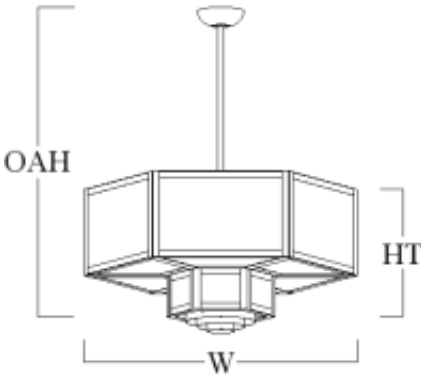

| Model Number                                                                | Lamping Code | Gallery Lamping     | Down Lamping            | Circuit | Finish | Diffuser | Mounting | Louver |
|-----------------------------------------------------------------------------|--------------|---------------------|-------------------------|---------|--------|----------|----------|--------|
| <b>HG2412W</b><br><br>• W 24<br>• HT 14<br>• OAH 48<br>(OverAll Height)     | FYS          | 11,900lm LED (77W)  |                         | 1       | PC     | WA<br>AG | TC       | SQ     |
|                                                                             | GLI          | 6-60W A19 (360W)    | 1-100W PAR38 (100W)     | 2       | PC     | WA<br>AG | TC       | SQ     |
| <b>HG3014W</b><br><br>• W 30<br>• HT 16<br>• OAH 72<br>(OverAll Height)     | FYT          | 17,300lm LED (116W) |                         | 1       | PC     | WA<br>AG | TC       | SQ     |
|                                                                             | GLJ          | 6-60W A19 (360W)    | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     |
| <b>HG3616W</b><br><br>• W 36<br>• HT 19<br>• OAH 96<br>(OverAll Height)     | DVJ          | 35,200lm LED (216W) | 7,100lm LED (51W)       | 2       | PC     | WA<br>AG | TC       | SQ     |
|                                                                             | FWH          | 6-100W A21 (600W)   | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     |
| <b>HG4218W</b><br><br>• W 42<br>• HT 21<br>• OAH 96<br>(OverAll Height)     | DZT          | 35,200lm LED (216W) | 12,500lm LED (93W)      | 2       | PC     | WA<br>AG | TC       | SQ     |
|                                                                             | FWI          | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     |
| <b>HG5422W</b><br><br>• W 54"<br>• HT 22"<br>• OAH 120"<br>(OverAll Height) | DVL          | 42,200lm LED (260W) | 12,500lm LED (93W)      | 2       | PC     | WA<br>AG | TC       | SQ     |
|                                                                             | FWJ          | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 2       | PC     | WA<br>AG | TC       | SQ     |

Scale

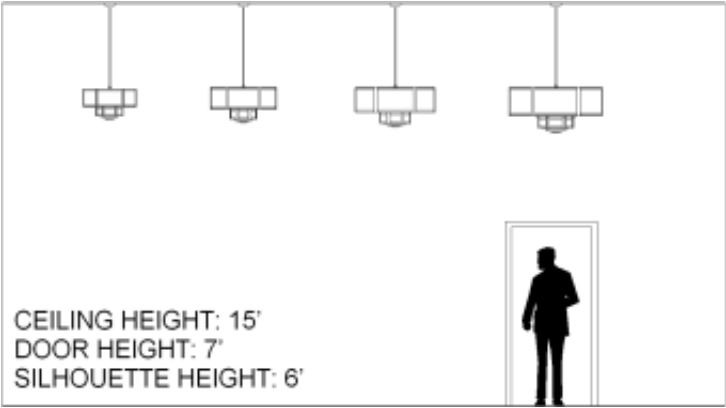

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

|            |                                            |
|------------|--------------------------------------------|
| 60W A19    | Medium Base, 60W Max, Incandescent or LED  |
| 100W PAR38 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

|    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

|    |                       |
|----|-----------------------|
| TC | Triple Chain Spreader |
|----|-----------------------|

Louvers

|    |             |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

|   |    |
|---|----|
| 0 | D1 |
| 1 | D2 |
| 2 | D3 |