


Hagerstown Series Short Pendant

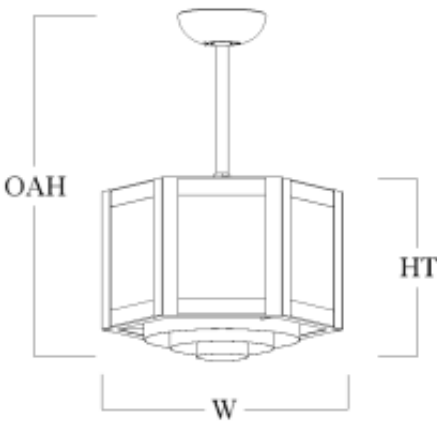


| Model Number                                                               | Lamping Code | Body Lamping      | Circuit | Finish | Diffuser | Mounting             | Louver |
|----------------------------------------------------------------------------|--------------|-------------------|---------|--------|----------|----------------------|--------|
| <b>HG1207P</b><br><br>• W 12<br>• HT 9<br>• OAH 48<br>(OverAll Height)     | ABL          | 2-100W A21 (200W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>HG1408P</b><br><br>• W 14<br>• HT 10<br>• OAH 48<br>(OverAll Height)    | GGP          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                            | ABN          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>HG1609P</b><br><br>• W 16<br>• HT 11<br>• OAH 48<br>(OverAll Height)    | GGS          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                            | ABP          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>HG1610P</b><br><br>• W 16"<br>• HT 10"<br>• OAH 48"<br>(OverAll Height) | GKP          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                            | GKO          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>HG1811P</b><br><br>• W 18<br>• HT 14<br>• OAH 48<br>(OverAll Height)    | GGT          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                            | ABR          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>HG2208P</b><br><br>• W 22<br>• HT 11                                    | ENE          | 9,700lm LED (58W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |

• OAH 48  
(OverAll Height)

|     |                     |   |    |          |                      |    |
|-----|---------------------|---|----|----------|----------------------|----|
| ENF | 15,800lm LED (116W) | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |
| GIT | 6-60W A19 (360W)    | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

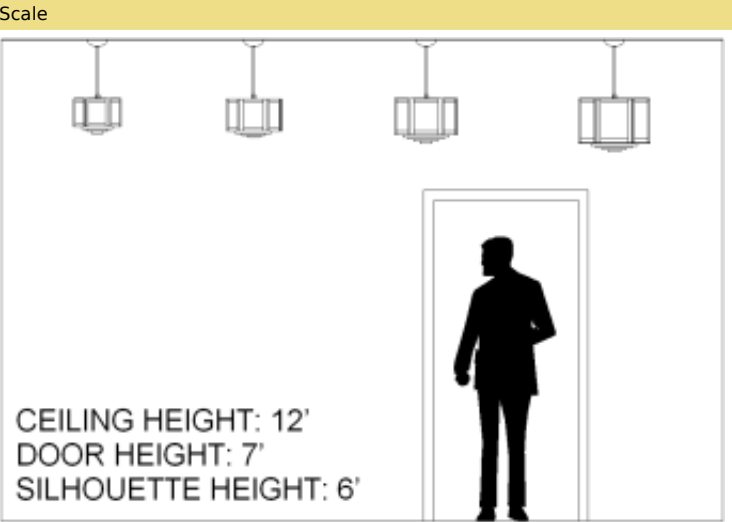

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

|          |                                           |
|----------|-------------------------------------------|
| 100W A21 | Medium Base, 100W Max, Incandesent or LED |
| 60W A19  | Medium Base, 60W Max, Incandesent or LED  |

Finish Types

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

|    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

|    |                             |
|----|-----------------------------|
| ST | Stem                        |
| CH | Chain                       |
| SM | Surface Mount Chain         |
| SP | Steep Pitch Canopy for Stem |

Louvers

|    |             |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

|   |    |
|---|----|
| 0 | D3 |
| 1 | D1 |
| 2 | D2 |