
Houston Series Ceiling Mount





| Model Number | Lamping Code | Body Lamping | | 1 | Circuit | Finish | Diffuser | Mounting | Louver | Options |
|---------------------------------|-----------------|--------------|---------------------|---|---------|--------|----------|----------|--------|-------------|
| HO1207C • W 12" • HT 10" | ABT | | 2-100W A21 (200W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| H01408C | GHB | | 5,400lm LED (33W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| • W 14" • HT 11" | ABV | | 3-100W A21 (300W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| HO1609C • W 16" | GJK | | 5,400lm LED (33W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| • HT 12" | ABX | | 3-100W A21 (300W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| H01811C | GHD | | 5,400lm LED (33W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| • W 18" • HT 14" | ABZ | | 3-100W A21 (300W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| H02208C | FXI | | 9,700lm LED (58W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| • W 22" • HT 11" | GML | | 13,600lm LED (109W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |
| | GEM | | 6-60W A19 (360W) | | 1 | PC | WA AG | CC FM | SQ | SIL LOGO |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key


Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED

Finish Types

PC

Powder Coat

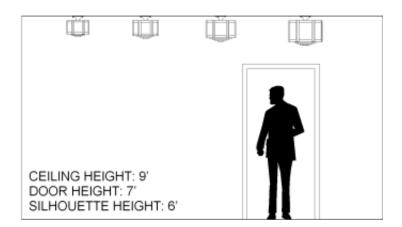

PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy
FM Flush Mount

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2

Options

SIL Silhouette Symbol LOGO Custom Logo