
# **Houston Series Short Pendant**





| Model Number  | Lamping<br>Code | Body Lamping      | Circuit | Finish | Diffuser | Mounting             | Louver | Options     |
|---|-----------------|-------------------|---------|--------|----------|----------------------|--------|-------------|
| <ul> <li>H01207P</li> <li>W 12"</li> <li>HT 7"</li> <li>OAH 48"<br/>(OverAll Height)</li> </ul> | ABL             | 2-100W A21 (200W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |

HO1408P GGP 5,400lm LED (33W) 1 PC WA ST SQ SIL СН LOGO AG • W 14" SM • HT 8" SP • OAH 48" 3-100W A21 (300W) 1 PC WA ST SQ SIL (OverAll Height) ABN AG CH LOGO SM SP HO1609P GGS 5,400lm LED (33W) 1 PC WA ST SQ SIL CH LOGO AG • W 16" SM • HT 9" SP • OAH 48" ABP 3-100W A21 (300W) 1 PC WA ST SQ SIL (OverAll Height) AG CH LOGO SM SP HO1610P GKP 5,400lm LED (33W) 1 PC WA ST SQ SIL LOGO AG СН • W 16" SM • HT 10" SP • OAH 48" 3-100W A21 (300W) 1 PC WA ST SIL GKO SQ (OverAll Height) СН LOGO AG SM SP 5,400lm LED (33W) HO1811P GGT 1 PC WA ST SQ SIL AG CH LOGO • W 18" SM • HT 11" SP • OAH 48" ABR 3-100W A21 (300W) 1 PC WA ST SQ SIL (OverAll Height) AG CH LOGO SM SP HO2208P ENE 9,700lm LED (58W) 1 PC WA ST SQ SIL AG CH LOGO • W 22" SM SP

• HT 8"


• OAH 48"

(OverAll Height)

| ENF | 15,800lm LED (116W) | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ | SIL<br>LOGO |  |
|-----|---------------------|---|----|----------|----------------------|----|-------------|--|
| GIT | 6-60W A19 (360W)    | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ | SIL<br>LOGO |  |

#### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

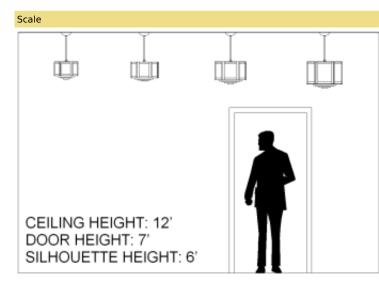

### PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

| Lamps    |   |
|----------|---|
| 100W A21 | Medium Base, 100W Max, Incandesent or LED |
| 60W A19  | Medium Base, 60W Max, Incandesent or LED  |

### Finish Types

PC

Powder Coat

| Diffuser Types |                           |
|----------------|---------------------------|
| WA             | Standard Acrylic Diffuser |
| AG             | Premium Glass Diffuser    |
|                |                           |
| Mountings      |                           |
| ST             | Stem                      |

| 51 | Stem                |
|----|---------------------|
| СН | Chain               |
| SM | Surface Mount Chain |

SP Steep Pitch Canopy for Stem

| Louvers       |             |  |  |
|---------------|-------------|--|--|
| SQ            | Square Cell |  |  |
| Dimming Types |             |  |  |
| 0             | D3          |  |  |
| 1             | D1          |  |  |
| 2             | D2          |  |  |
|               |             |  |  |

### Options

| SIL  | Silhouette Symbol |
|------|-------------------|
| LOGO | Custom Logo       |