Craft Metal Products Inc.

2751 N. Emerson Ave.
Indianapolis, IN 46218
(800) 669-3254
(317) 545-3252

# Houston Series Wall Sconce




| Model Number | Lamping Code | Body Lamping | Circuit | Finish | Diffuser | Mounting | Louver | Options |
|---|---|---|---|---|---|---|---|---|
| **HO0816S**<br>• W 8"<br>• HT 16"<br>• EXT 4" | DYD | 1,000lm LED (5W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | DYE | 2,200lm LED (14W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | ACB | 1-60W A19 (60W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| **HO1020S**<br>• W 10"<br>• HT 20"<br>• EXT 5" | DYF | 2,200lm LED (14W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | DYG | 3,800lm LED (22W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | ACD | 2-100W A21 (200W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| **HO1224S**<br>• W 12"<br>• HT 24"<br>• EXT 6" | FEC | 6,300lm LED (40W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | FED | 7,100lm LED (44W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | FEB | 3-100W A21 (300W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| **HO1426S**<br>• W 14"<br>• HT 26"<br>• EXT 7" | DDT | 6,300lm LED (40W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | DYJ | 8,200lm LED (53W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | GBM | 4-60W A19 (240W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |
| | ACI | 3-100W A21 (300W) | 1 | PC | WA AG | WM | BD | SIL LOGO BL |

SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

## Scale

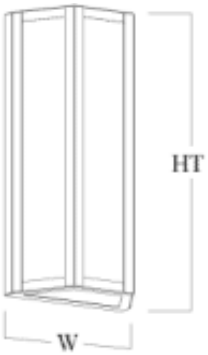


**PRODUCT FEATURES**

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

### Lamps
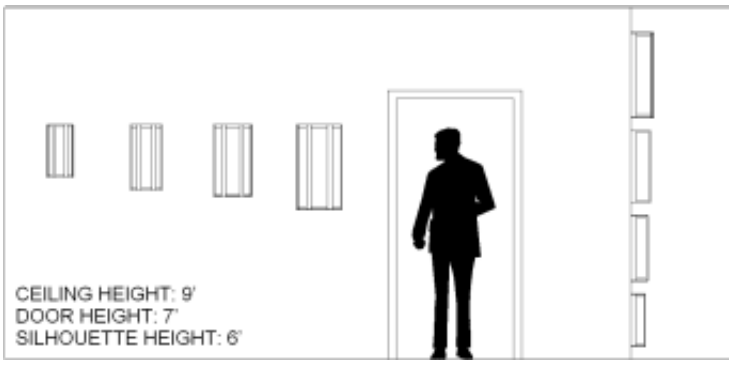
| | |
|---|---|
| 60W A19 | Medium Base, 60W Max, Incandesent or LED |
| 100W A21 | Medium Base, 100W Max, Incandesent or LED |

### Finish Types

| | |
|---|---|
| PC | Powder Coat |

### Diffuser Types

| | |
|---|---|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser |

### Mountings

| | |
|---|---|
| WM | Wall Mount |

### Louvers

| | |
|---|---|
| BD | Bottom Perf Door |

### Dimming Types

| | |
|---|---|
| 0 | D1 |
| 1 | D2 |

### Options

| | |
|---|---|
| SIL | Silhouette Symbol |
| LOGO | Custom Logo |
| BL | Bottom Lens |
| BD | Bottom Door |