


## Jamestown Series 3 Arm Cluster Pendant

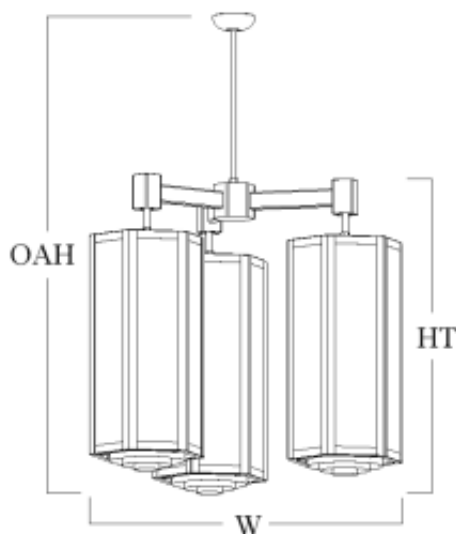

**SAMPLE CATALOG NUMBER**  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options


Model	Lamping Options											Dimensions	
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions		
JT2722U	AEY	6-F39BX (231W)	3-F70QBX (242W)	120/277	2	PC	CR	CH	AD	DM	W	38"	
	AEW	9-100A19 (900W)	3-300R40 (900W)	120	2						HT	31"	
JT3026U	DQK	38,100lm LED (296W)	21,000lm LED (209W)	120/277	2	PC	CR	CH	AD	DM	W	42"	
	DQM	55,700lm LED (443W)	36,000lm LED (299W)	120/277	2						HT	36"	
	AFA	12-F39BX (461W)	3-F70QBX (242W)	120/277	2						OAH	10'	
	DIU	18-100A19 (1800W)	3-300R40 (900W)	120	2						Y	3 @ 10"x20"	
											X	3 @ 12"x24"	
JT3931U	DQN	38,100lm LED (296W)	36,000lm LED (299W)	120/277	2	PC	CR	CH	AD	DM	W	53"	
	DQO	55,700lm LED (443W)	36,000lm LED (299W)	120/277	2						HT	41"	
	DQP	68,700lm LED (605W)	36,000lm LED (299W)	120/277	2						OAH	10'	
	AFD	12-F40BX (461W)	6-F70QBX (483W)	120/277	2						Y	3 @ 10"x20"	
	AFF	18-F40BX (692W)	6-F70QBX (483W)	120/277	2						X	3 @ 16"x33"	
	AFH	24-F40BX (922W)	6-F70QBX (483W)	120/277	2								
	DIV	18-100A19 (1800W)	3-300R40 (900W)	120	2								
JT4836U	DQQ	57,200lm LED (443W)	36,000lm LED (299W)	120/277	2	PC	CR	CH	AD	DM	W	64"	
	DQR	76,300lm LED (591W)	36,000lm LED (299W)	120/277	2						HT	46"	
	AFK	12-F40BX (461W)	6-F70QBX (483W)	120/277	2						OAH	10'	
	AFM	18-F40BX (692W)	6-F70QBX (483W)	120/277	2						Y	3 @ 10"x20"	
	AFO	24-F40BX (922W)	6-F70QBX (483W)	120/277	2						X	3 @ 18"x38"	
	DIW	27-100A19 (2700W)	3-300R40 (900W)	120	3								

**Scale** **Abbreviation Key**

**Dimensions**

- W Width
- HT Height
- OAH Overall Height
- X X-Dimension
- Y Y-Dimension

**Lamp Descriptions**

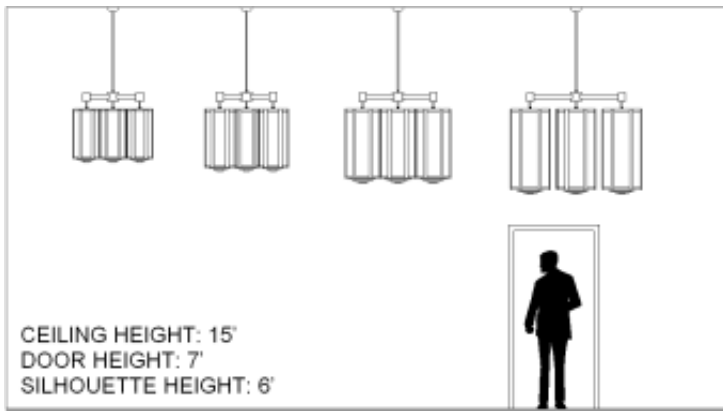

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

100A19	100W A19, medium base
300R40	300W R40, medium base
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

#### Finishes

PC	Powder Coat
----	-------------

#### Hanging Style

SS	SINGLE STEM
CH	CHAIN

#### Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass
GA	Glass Alternative

#### Options

DM	Dimming
DIM-010	0-10V four wire control dimming

#### Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)