
Los Angeles Series Wall Bracket






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
LA0816B	AHZ	1-100W A21 (100W)	1	PC	WA	WM	SQ	BL
• W 9 • HT 16 • EXT 12								
LA1224B	FFX	5,400Im LED (33W)	1	PC	WA	WM	SQ	BL

LA1224B	FFX	5,400lm LED (33W)	1	PC	WA	WM	SQ	BL	
• W 13 • HT 24	GBW	2-100W A21 (200W)	1	PC	WA	WM	SQ	BL	

• EXT 16

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

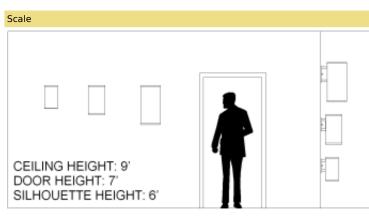

PRODUCT FEATURES

- Fabricated and welded metal housing · Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard) · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer

Abbreviation Key

Lamps				
100W A21	Medium Base, 100W Max, Incandesent or LED			
Finish Types				
PC	Powder Coat			
Diffuser Types				
WA	Standard Acrylic Diffuser			
Mountings				
WM	Wall Mount			
Louvers				
SQ	Square Cell			
Dimming Types				
0	D1			

- manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
 Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
 Contact Us for more lamping options.

1 D3

Options

BL Bottom Lens