


Los Angeles Series Wall Sconce






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Louver
• W 9" • HT 20" • EXT 4"	BGW	2-60W A19(120W)	1	PC	WA	BL
• W 11" • HT 24" • EXT 6"	EBJ	2-60W A19 (120W)	1	PC	WA	BL
LA1136S-E • W 11"	FYE	3-100W A21 (300W)	1	PC	WA	BL

• EXT 5.5"

• HT 36"

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

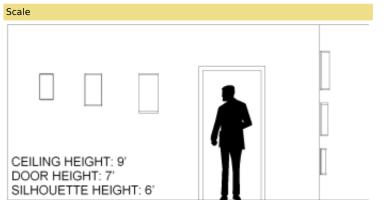

PRODUCT FEATURES

• Fabricated and welded Stainless Steel metal housing

Abbreviation Key

Mountings

Lamps				
60W A19	Medium Base, 60W Max, Incandesent or LED			
100W A21	Medium Base, 100W Max, Incandesent or LED			
Finish Types				
PC	Powder Coat			
Diffuser Types				
WA	Standard Acrylic Diffuser			

- Powder coated metallic finish
 UV stable, white acrylic diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED or fluorescent lamping
 Wired for single circuit operation (Body Lamping)
 High power factor electronic ballast or LED driver
 Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options. temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.

 Optional dimming ballast 120V or 277V (LED or fluorescent lamping)

 Mounts to standard electrical junction box (by others)

- LED Battery Back-Up AvailableUL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WM Wall Mount

Louvers

BL Bottom Lens