


A tall, ornate brass lantern with a gothic design, featuring pointed arches and decorative finials, hanging from a chain. The lantern has a hexagonal body with a decorative top and bottom. It is suspended by a chain from a small brass ring. The background is a plain, light-colored wall.

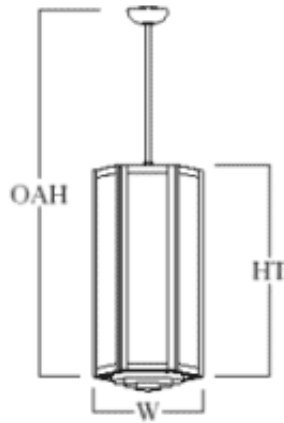

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
LC1224L • W 12 • HT 28 • OAH 72 (OverAll Height)	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
LC1426L • W 14 • HT 30 • OAH 96 (OverAll Height)	DVG	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DFB	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DTG	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	EOB	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DFJ	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
	LC1631L • W 16 • HT 36 • OAH 96 (OverAll Height)	DFA	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP

	DLX	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DCR	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
LC1836L • W 18 • HT 41 • OAH 120 (OverAll Height)	FYJ	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FJJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
LC2242L • W 22 • HT 48 • OAH 120 (OverAll Height)	GGO	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

CEILING HEIGHT: 15'
 DOOR HEIGHT: 7'
 SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandesent or LED
100W PAR38	Medium Base, 100W Max, Incandesent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
TC	Triple Chain Spreader
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2
2	D3
3	D16

