


Norwich Series 3-Arm Cluster Pendant

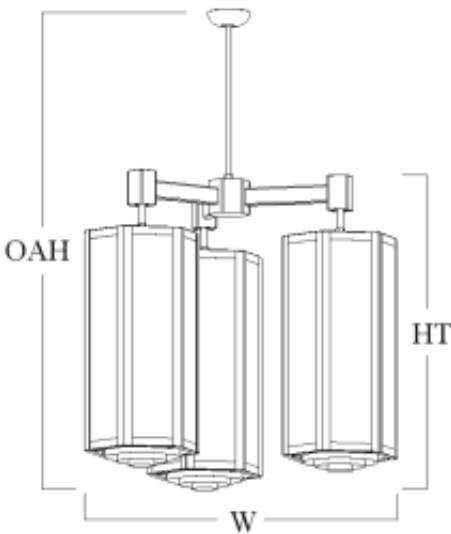

| Model Number                                                                                    | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louwer |
|-------------------------------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|
| NW2724U<br><div>• W 37<br/>• HT 36<br/>• OAH 96<br/>(OverAll Height)<br/>• Y 3 @ 12"x29"</div>  | GCT          | 12-60W A19 (720W)   | 3-100W A21 (300W)   | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
| NW3026U<br><div>• W 42<br/>• HT 39<br/>• OAH 96<br/>(OverAll Height)<br/>• Y 3 @ 14"x32"</div>  | DRI          | 43,600lm LED (258W) | 21,400lm LED (152W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 | DRK          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 | GCU          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
| NW3931U<br><div>• W 53<br/>• HT 45<br/>• OAH 120<br/>(OverAll Height)<br/>• Y 3 @ 16"x37"</div> | DRL          | 43,600lm LED (258W) | 37,600lm LED (278W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 | DRM          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 | DRN          | 88,700lm LED (575W) | 37,600lm LED (278W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 | GCW          | 18-60W A19 (1080W)  | 3-100W A19 (300W)   | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |
|                                                                                                 |              |                     |                     |         |        |          |          |        |
| NW4836U<br><div>• W 63<br/>• HT 51<br/>• OAH 120<br/>(OverAll Height)<br/>• Y 3 @ 18"x43"</div> | GAE          | 53,600lm LED (298W) | 15,500lm LED (108W) | 2       | PC     | WA<br>AG | ST<br>SP | SQ     |

|     |                      |                     |   |    |          |          |    |
|-----|----------------------|---------------------|---|----|----------|----------|----|
| GAF | 53,600lm LED (298W)  | 20,100lm LED (141W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZY | 74,800lm LED (436W)  | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZZ | 105,900lm LED (713W) | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| GCY | 27-60W A19 (1620W)   | 3-100W A21 (300W)   | 3 | PC | WA<br>AG | ST<br>SP | SQ |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

Scale

CEILING HEIGHT: 15'  
DOOR HEIGHT: 7'  
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

|          |                                            |
|----------|--------------------------------------------|
| 60W A19  | Medium Base, 60W Max, Incandescent or LED  |
| 100W A21 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

|    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

|    |                             |
|----|-----------------------------|
| ST | Stem                        |
| SP | Steep Pitch Canopy for Stem |

Louvers

|    |             |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

|   |    |
|---|----|
| 0 | D1 |
| 1 | D2 |
| 2 | D3 |