

## **Norwich Series 3-Tier Large Pendant**





Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
NW3038H	GLH	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH	SQ
• W 30							AG	SP	

• HT 44

• OAH 72

(OverAll Height)

NW3642H	DWH	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH	SQ
• W 36 • HT 46 • OAH 96	DJH	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA	SP ST	SQ
(OverAll Height)	וונס	0-100W A21 (000W)	0-100W A21 (000W)	1-100W K40/Fal36 (100W)	J	FC	AG	CH SP	50
NW4249H	DWK	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED(93W)	2	PC	WA AG	ST CH	SQ
• W 42 • HT 54								SP	
• OAH 120 (OverAll Height)	FWL	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ
NW5460H • W 54" • HT 60" • OAH 120" (OverAll Height)	DWL	28,100lm LED (152W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ
	ELK	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ


SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Lamps

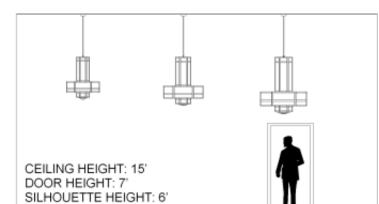

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping • Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature
- availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height is the length from the ceiling to the bottom of the fixture.)
- · Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Medium Base, 100W Max, Incandesent or LED 100W R40/Par38

Finish Types				
PC	Powder Coat			
Diffuser Types				
WA	Standard Acrylic Diffuser			
AG	Premium Glass Diffuser			
Mountings				
ST	Stem			
СН	Chain			
SP	Steep Pitch Canopy for Stem			

## Louvers

0

SQ Square Cell

D1

## **Dimming Types**