
Craft Metal Products Inc.

Norwich Series Pendant





Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
NW1224L • W 12 • HT 30	GEL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ


• OAH 72 (OverAll Height)

• W 14 • HT 32	DNT	14,500lm LED(86W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SM SP	SQ
• OAH 96 (OverAll Height)	DNU	14,500lm LED(86W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ
	DNW	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FIP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
• W 16 • HT 37	DOU	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
• OAH 96 (OverAll Height)	DMB	23,100lm LED (146W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ
	DGD	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FLP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
NW1836L • W 18 • HT 42	FZV	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ

• OAH 120 (OverAll Height)	FZW	35,300lm LED (238W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM	SQ
	FIS	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	SP ST CH SM SP	SQ
NW2242L • W 22 • HT 50	GLA	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
• OAH 120 (OverAll Height)	FIU	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

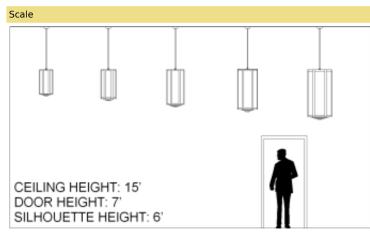

PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W PAR38	Medium Base, 100W Max, Incandesent or LED

Finish Types

SQ

Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings	
ST	Stem
СН	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers Square Cell

0 D1
• <u> </u>
1 D2
2 D3