


Oak Park Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting
OP1812B • W 18" • HT 12"	ELL	2,200lm LED (17W)	1	PC	WA AG	WM
	BSE	1-100W A21 (100W)	1	PC	WA AG	WM
OP2415B • W 24" • HT 15"	ELM	3,500lm LED (28W)	1	PC	WA AG	WM
	BSG	1-100W A21 (100W)	1	PC	WA AG	WM

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

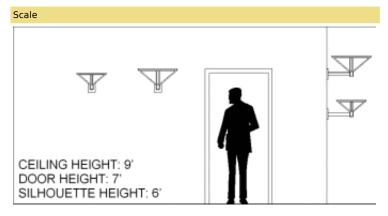

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic bowl diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
 High power factor electronic LED driver

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

Standard Acrylic Diffuser AG Premium Glass Diffuser

Mountings

WM Wall Mount

Dimming Types

D1

0

- Wired for single circuit operation, Body Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
 Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
 Mounts to standard electrical junction box (by others)
 UL / CUL or ETL / cETL listed
 Contact Us for more lamping options.

- Contact Us for more lamping options.