


## Oxford Series 6 Arm Satellite Pendant

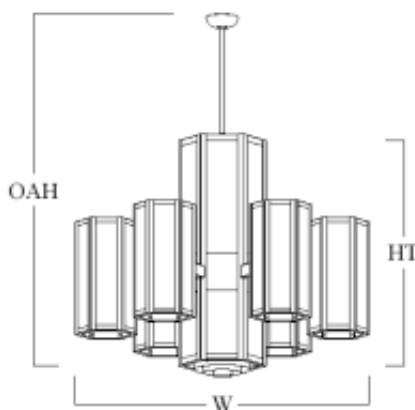

SAMPLE CATALOG NUMBER  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options												Dimensions	
Model Number	Lamping Code	Body Lamping	Satellite Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions		
OX4836A	ADQ	4-F39BX (156W) 2-F32TBX (77W)	12-F39BX (468W)	1-F70QBX (81W)	120/277	3	PC	CR SQ	CH SS	AD AG GA	DM	W 48" HT 39"		
	EIB	3-MAX 60 IN/SBCF/LED (180W) 2-MAX 60 IN/SBCF/LED (120W)	12-MAX 60 IN/SBCF/LED (720W)	1-26W PAR38 LED (26W)	120	3						OAH 8" X 1 @ 14"x39" Y 6 @ 10"x22"		
OX6045A	ADS	4-F40BX (164W) 2-F32TBX (77W)	12-F39BX (468W)	2-F70QBX (161W)	120/277	3	PC	CR SQ	CH SS	AD AG GA	DM	W 60" HT 48"		
	EIC	6-MAX 60 IN/SBCF/LED (360W) 3-MAX 60 IN/SBCF/LED (180W)	12-MAX 60 IN/SBCF/LED (720W)	1-26W PAR38 LED (26W)	120	3						OAH 120" X 1 @ 16"x48" Y 6 @ 12"x24"		
OX7254A	ADU	6-F40BX (245W) 2-F32TBX (77W)	12-F40BX (490W)	2-F70QBX (161W)	120/277	3	PC	CR SQ	CH SS	AD AG GA	DM	W 72" HT 58"		
	EID	9-MAX 60 IN/SBCF/LED (540W) 3-MAX 60 IN/SBCF/LED (180W)	12-MAX 60 IN/SBCF/LED (720W)	1-26W PAR38 LED (26W)	120	3						OAH 120" X 1 @ 18"x58" Y 6 @ 14"x29"		


Scale

Abbreviation Key

### Dimensions

W	Width
HT	Height
OAH	Overall Height
X	X-Dimension
Y	Y-Dimension

### Lamp Descriptions

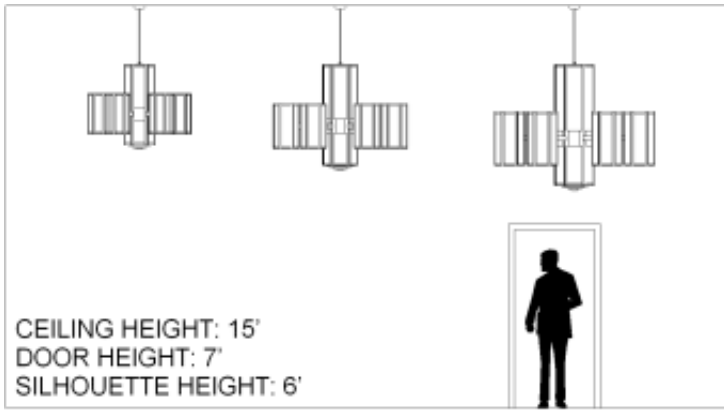

26W PAR38 LED	18W A21 LED
MAX 60 IN/SBCF/LED	Medium Base, 60W Max, Incandesent or LED
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F32TBX	32W triple biax, 4-PIN GX24q-3 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base

#### Finishes

PC	Powder Coat
----	-------------

#### Hanging Style

SS	SINGLE STEM
CH	CHAIN

#### Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass
GA	Glass Alternative

#### Options

DM	Dimming
----	---------

#### Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Down Lamping/Satellite Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.