



Pasadena Series 3-Arm Cluster Pendant

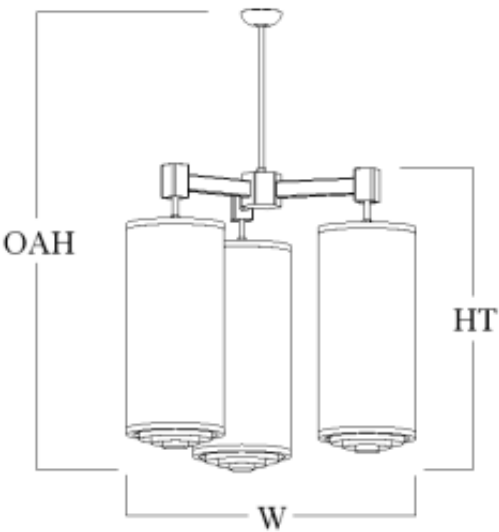

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PA2724U • W 37 • HT 32 • OAH 72 (OverAll Height) • Y 3 @ 10"x24"	GCN	12-60W A19 (720W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO
PA3026U • W 42 • HT 34 • OAH 96 (OverAll Height) • Y 3 @ 12"x26"	DSU	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DSV	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	GCO	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO
PA3931U • W 51 • HT 39 • OAH 96 (OverAll Height) • Y 3 @ 12"x31"	DSY	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DSX	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DSZ	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	GCP	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat

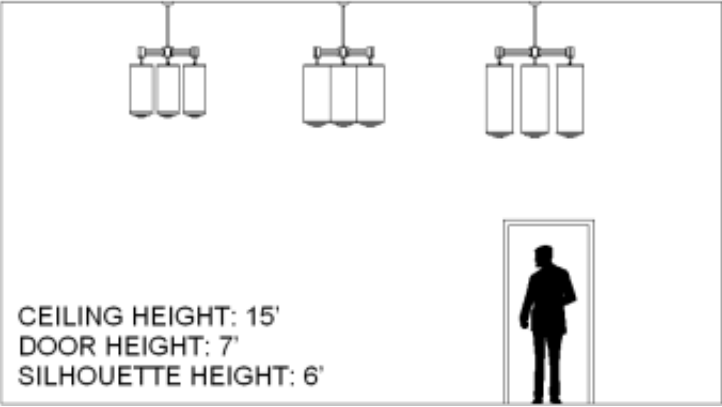

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types	
WA	Standard Acrylic Diffuser
Mountings	
ST	Stem
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo