



Portland Series 3-Arm Cluster Pendant

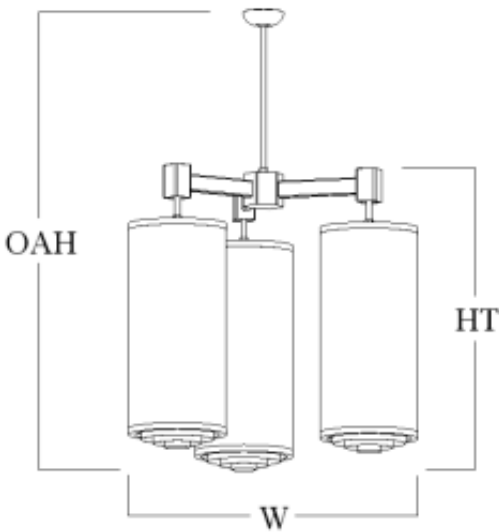

| Model Number                                                                                                                                 | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louver | Options  |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|----------|
| PO2724U <ul style="list-style-type: none"><li>• W 27"</li><li>• HT 32"</li><li>• OAH 72" (OverAll Height)</li><li>• Y 3 @ 10"x24"</li></ul>  | GCH          | 12-60W A19 (720W)   | 3-100W A19 (300W)   | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
| PO3026U <ul style="list-style-type: none"><li>• W 42"</li><li>• HT 34"</li><li>• OAH 96" (OverAll Height)</li><li>• Y 3 @ 12"x26"</li></ul>  | DQI          | 43,600lm LED (258W) | 21,400lm LED (152W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              | DQJ          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              | GCI          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
| PO3931U <ul style="list-style-type: none"><li>• W 51"</li><li>• HT 39"</li><li>• OAH 96" (OverAll Height)</li><li>• Y 3 @ 12"x31"</li></ul>  | EAT          | 43,600lm LED (258W) | 37,600lm LED (278W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              | DQD          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              | DSG          | 88,700lm LED (575W) | 37,600lm LED (278W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              | GCI          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |
| PO3936U <ul style="list-style-type: none"><li>• W 39"</li><li>• HT 44"</li><li>• OAH 120" (OverAll Height)</li><li>• Y 3 @ 12"x36"</li></ul> | GDX          | 74,800lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA       | ST SP    | SQ     | SIL LOGO |
|                                                                                                                                              |              |                     |                     |         |        |          |          |        |          |

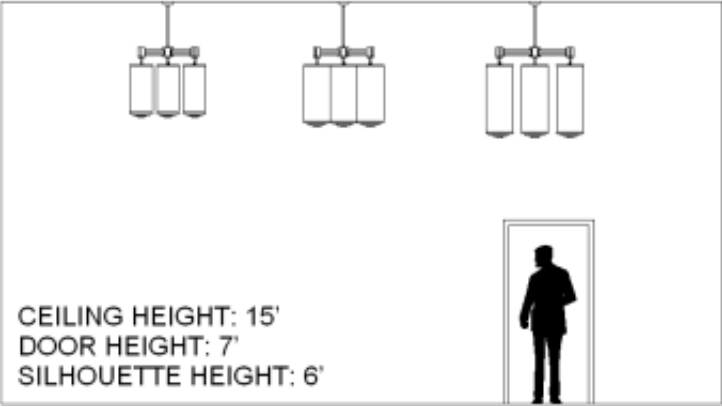

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| Lamps          |                                            |
|----------------|--------------------------------------------|
| 60W A19        | Medium Base, 60W Max, Incandescent or LED  |
| 100W A19       | Medium Base, 100W Max, Incandescent or LED |
| Finish Types   |                                            |
| PC             | Powder Coat                                |
| Diffuser Types |                                            |
| WA             | Standard Acrylic Diffuser                  |
| Mountings      |                                            |
| ST             | Stem                                       |
| SP             | Steep Pitch Canopy for Stem                |
| Louvers        |                                            |
| SQ             | Square Cell                                |
| Dimming Types  |                                            |
| 0              | D1                                         |
| Options        |                                            |
| SIL            | Silhouette Symbol                          |
| LOGO           | Custom Logo                                |