



Phoenix Series 3-Arm Cluster Pendant

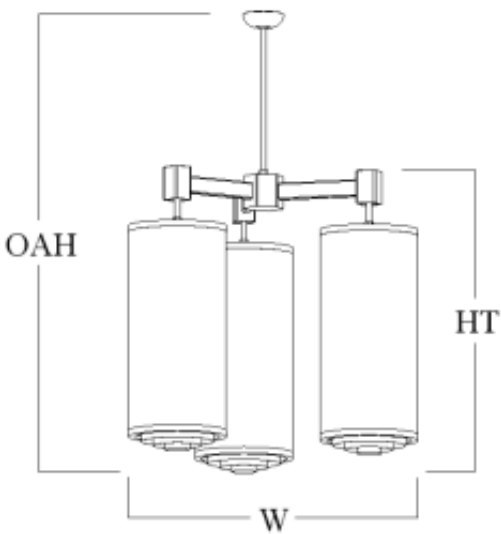

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PX2724U	GCN	12-60W A19 (720W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	CUT LOGO
	• W 37 • HT 32 • OAH 72 (OverAll Height) • Y 3 @ 10"x24"								
PX3026U	DSU	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	ST SP	SQ	CUT LOGO
	DSV	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	CUT LOGO
	GCO	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	CUT LOGO
	• W 42 • HT 34 • OAH 96 (OverAll Height) • Y 3 @ 12"x26"								
PX3931U	DSY	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	CUT LOGO
	DSX	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	CUT LOGO
	DSZ	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	CUT LOGO
	GCP	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	CUT LOGO
	• W 51 • HT 39 • OAH 96 (OverAll Height) • Y 3 @ 12"x31"								

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat

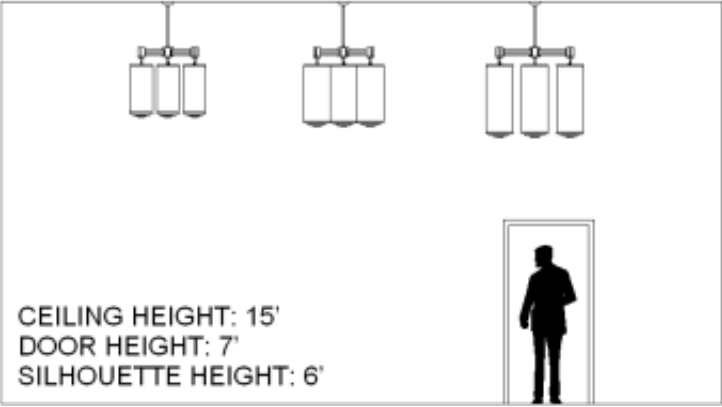

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

ST Stem

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

Dimming Types

0 D1

Options

CUT Cut-Out Symbol

LOGO Custom Logo