
# **Randolph Series Ceiling Mount**





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
<b>RD1207C</b> • W 12 • HT 13	AMY	2-100W A21 (200W)	1	PC	WA AG	СС	SQ
RD1408C  • W 14 • HT 15	ANA	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
RD1609C  • W 16 • HT 16	GFC	5,400lm LED (33W)	1	PC	WA AG	CC	SQ
	ANC	3-100W A21 (300W)	1	PC	WA AG	СС	SQ
RD1811C • W 18 • HT 19	GFD	5,400lm LED (33W)	1	PC	WA AG	CC	SQ
	ANE	3-100W A21 (300W)	1	PC	WA AG	СС	SQ
RD2208C • W 22	FYA	9,700lm LED (58W)	1	PC	WA AG	CC	SQ

SAMPLE CATALOG NUMBER


Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

• HT 12

Abbreviation Key

Lamps

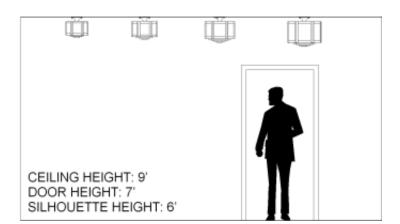

## PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Finish Types

PC Powder Coat

## Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

## Mountings

CC Ceiling Canopy

## Louvers

SQ Square Cell

## **Dimming Types**

0 D1

1 D2