



# **Roselle Series Wall Sconce**





Model Number	Lamping E Code	Body Lamping (	Circuit	Finish	Diffuser	Mounting	Louver	Options
RE0816S  • W 8"  • HT 16"  • EXT 4"	DYD	1,000lm LED (5W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	DYE	2,200lm LED (14W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	ACB	1-60W A19 (60W)	1	PC	WA AG	WM	BD	CUT LOGO BL
• W 10" • HT 20" • EXT 5"	DYF	2,200lm LED (14W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	DYG	3,800lm LED (22W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	ACD	2-100W A21 (200W)	1	PC	WA AG	WM	BD	CUT LOGO BL
• W 12" • HT 24" • EXT 6"	FEC	6,300lm LED (40W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	FED	7,100lm LED (44W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	FEB	3-100W A21 (300W)	1	PC	WA AG	WM	BD	CUT LOGO BL
RE1426S  • W 14"  • HT 26"  • EXT 7"	DDT	6,300lm LED (40W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	DYJ	8,200lm LED (53W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	GBM	4-60W A19 (240W)	1	PC	WA AG	WM	BD	CUT LOGO BL
	ACI	3-100W A21 (300W)	1	PC	WA AG	WM	BD	CUT LOGO BL

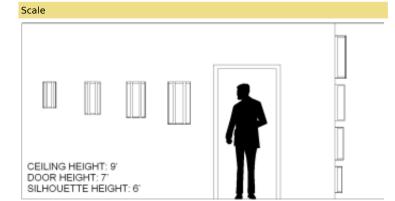

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
   Standard LED CCT is 3000 Kelvin contact us for alternate color temperature
- Standard LED COT is 80 contact us for alternate CRI availability
   Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

### Abbreviation Key

### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W A21 Medium Base, 100W Max, Incandesent or LED

### Finish Types

**Powder Coat** 

### **Diffuser Types**

WA Standard Acrylic Diffuser AG Premium Glass Diffuser

### Mountings

WM Wall Mount

#### Louvers

BD **Bottom Perf Door** 

### **Dimming Types**

0 D1 1 D2

### Options

CUT Cut-Out Symbol LOGO Custom Logo BL **Bottom Lens** BD Bottom Door