
Rockford Series 3-Arm Cluster Pendant





Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RF2724U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA	ST SP	SQ	SIL

- W 27'
- HT 32"
- OAH 72" (OverAll Height)
- Y 3 @ 10"x24"


RF3026U	DQI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	ST SP	SQ	SIL
• W 43 • HT 34 • OAH 96 (OverAll Height) • Y 3 @ 13"x26"	DQJ	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL
RF3931U • W 52 • HT 39 • OAH 96 (OverAll Height) • Y 3 @ 13"x31"	EAT	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL
	DQD	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL
	DSG	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL
	GCJ	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL
RF3936U	GDX	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL

- W 39" HT 44"
- OAH 120" (OverAll Height) Y 3 @ 12"x36"

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

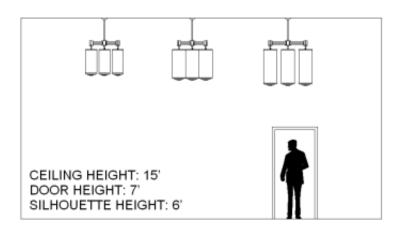

PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

100W A19 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

Stem ST

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

Dimming Types

0 D1

Options

SIL Silhouette Symbol