
Rockford Series Pendant





Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RF1024L • W 11 • HT 24 • OAH 72	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA	ST CH SM SP	SQ	SIL


(OverAll Height)

RF1226L • W 13 • HT 26 • OAH 96 (OverAll Height)	DVD	14,500lm LED (86W)	5,100lm LED(36W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DNY	14,500lm LED(86W)	7,100lm LED(51W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DNZ	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DOA	23,100lm LED(146W)	7,100lm LED(51W)	2	PC	WA	ST CH SM SP	SQ	SIL
	ETG	23,100lm LED(146W)	10,400lm LED (76W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DOB	23,100lm LED(146W)	12,500lm LED (93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	ST CH SM SP	SQ	SIL
RF1231L • W 13 • HT 31 • OAH 96 (OverAll Height)	DXL	14,500lm LED (86W)	7,100lm LED(51W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DOS	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	DMF	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA	ST	SQ	SIL

							CH SM SP		
	DKO	29,500lm LED(192W)	12,500lm LED(93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	FIZ	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	ST CH SM SP	SQ	SIL
RF1236L • W 13 • HT 36 • OAH 96 (OverAll Height)	GKG	10,800lm LED (60W)		1	PC	WA	ST CH SM SP	SQ	SIL
	GDZ	15,400lm LED(86W)	5,100lm LED(36W)	2	PC	WA	ST CH SM SP	SQ	SIL
	GEF	17,800lm LED (100W)	12,500lm LED (93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	GES	24,900lm LED(146W)	12,500lm LED(93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	GEV	39,000lm LED(267W)	12,500lm LED(93W)	2	PC	WA	ST CH SM SP	SQ	SIL
	GIX	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA	ST CH SM SP	SQ	SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

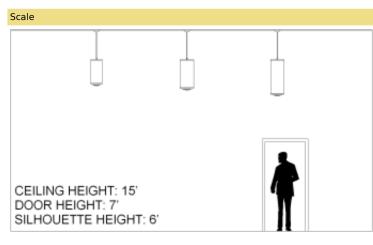

PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key Lamps 60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED **Finish Types** PC Powder Coat **Diffuser Types** WA Standard Acrylic Diffuser Mountings ST Stem СН Chain SM Surface Mount Chain SP Steep Pitch Canopy for Stem

Louvers		
SQ	Square Cell	
Dimming	Types	
0	D1	
1	D2	
2	D3	

Options

SIL

Silhouette Symbol