Rockford Series Wall Bracket






Model Number	Lamping Code	Body Lamping		Circ	iit Finish	Diffuser	Mounting	Louver	Options
• W 8" • HT 16" • EXT 11"	AHZ		1-100W A21 (100W)	1	PC	WA	WM	SQ	SIL BL
RF1020B	DEM		3,900lm LED (24W)	1	PC	WA	WM	SQ	SIL BL
• W 10" • HT 20" • EXT 13"	AIB		1-100W A21 (100W)	1	PC	WA	WM	SQ	SIL BL
RF1224B	FFX		5,400lm LED (33W)	1	PC	WA	WM	SQ	SIL BL
• W 12" • HT 24" • EXT 15"	GBW		2-100W A21 (200W)	1	PC	WA	WM	SQ	SIL BL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

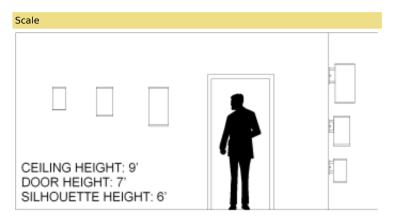

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

WM Wall Mount

- Optional specialty diffuser materials available
 Energy efficient LED lamping
 High power factor electronic LED driver
 Wired for single circuit operation, Body Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
 Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers

SQ Square Cell

Dimming Types

0 D1 D3 2

Options

SIL Silhouette Symbol BL Bottom Lens