
# **Raleigh Series Ceiling Mount**





Model Number	Lamping Code	Body Lamping	Circu	t Finish	Diffuser	Mounting	Louver	Options
RL1207C  • W 12"  • HT 10"	ABT	2-100W A21 (200W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL1408C	GHB	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
• W 14" • HT 11"	ABV	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL1609C	GJK	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
• W 16" • HT 12"	ABX	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL1811C	GHD	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
• W 18" • HT 14"	ABZ	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL2208C	FXI	9,700lm LED (58W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
• W 22" • HT 11"	GML	13,600lm LED (109W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	GEM	6-60W A19 (360W)	1	PC	WA AG	CC FM	SQ	SIL LOGO

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

## Abbreviation Key


La	m	ps
----	---	----

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED

**Powder Coat** 

Finish Types

PC

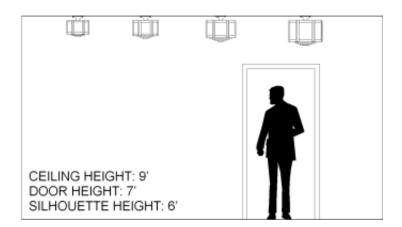

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

#### Mountings

CC Ceiling Canopy
FM Flush Mount

## Louvers

SQ Square Cell

## **Dimming Types**

0 D1 1 D2

## Options

SIL Silhouette Symbol LOGO Custom Logo