



Raleigh Series Wall Sconce

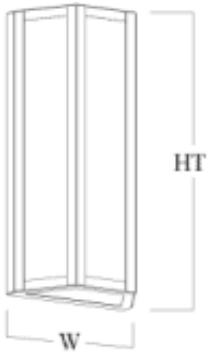

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RL0816S • W 8" • HT 16" • EXT 4"	DYD	1,000lm LED (5W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DYE	2,200lm LED (14W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ACB	1-60W A19 (60W)	1	PC	WA AG	WM	BD	SIL LOGO BL
RL1020S • W 10" • HT 20" • EXT 5"	DYF	2,200lm LED (14W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DYG	3,800lm LED (22W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ACD	2-100W A21 (200W)	1	PC	WA AG	WM	BD	SIL LOGO BL
RL1224S • W 12" • HT 24" • EXT 6"	FEC	6,300lm LED (40W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	FED	7,100lm LED (44W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	FEB	3-100W A21 (300W)	1	PC	WA AG	WM	BD	SIL LOGO BL
RL1426S • W 14" • HT 26" • EXT 7"	DDT	6,300lm LED (40W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	DYJ	8,200lm LED (53W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	GBM	4-60W A19 (240W)	1	PC	WA AG	WM	BD	SIL LOGO BL
	ACI	3-100W A21 (300W)	1	PC	WA AG	WM	BD	SIL LOGO BL

Scale

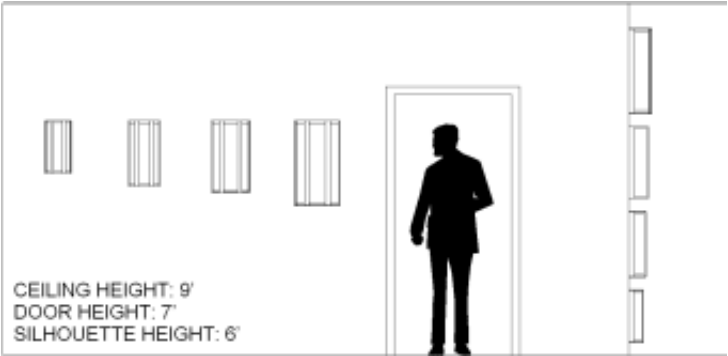

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandescent or LED
100W A21	Medium Base, 100W Max, Incandescent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

WM	Wall Mount
----	------------

Louvers

BD	Bottom Perf Door
----	------------------

Dimming Types

0	D1
1	D2

Options

SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens
BD	Bottom Door