


# **Richmond Series Short Pendant**






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
• W 12 • HT 9 • OAH 48 (OverAll Height)	ABL	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ
RM1408P  • W 14 • HT 10	GGP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
OAH 48 (OverAll Height)	ABN	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
RM1609P  • W 16 • HT 11	GGS	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
OAH 48 (OverAll Height)	ABP	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
RM1610P  • W 16" • HT 10"	GKP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
• OAH 48" (OverAll Height)	GKO	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
RM1811P  • W 18 • HT 13	GGT	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
OAH 48 (OverAll Height)	ABR	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
RM2208P  • W 22 • HT 10	ENE	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ

• OAH 48 (OverAll Height)	ENF	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ
	GIT	6-60W A19 (360W)	1	PC	WA AG	ST CH SM	SQ

#### SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

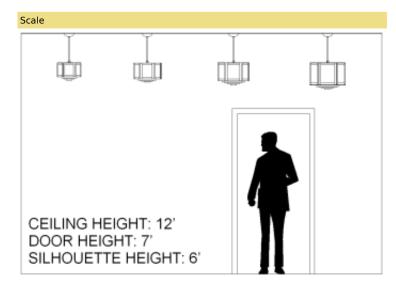

# PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

# Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED SP

# Finish Types

PC Powder Coat

## **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

# Mountings

ST Stem
CH Chain
SM Surface Mount Chain
SP Steep Pitch Canopy for Stem

#### Louvers

SQ Square Cell

## **Dimming Types**

0 D1 1 D2 2 D3