


# **Riverside Series Wall Sconce**





| Model Number                         | Lamping<br>Code | Body Lamping      | Circuit | Finish | Diffuser | Diffuser<br>Accent | Mounting | Louver | Options           |
|--------------------------------------|-----------------|-------------------|---------|--------|----------|--------------------|----------|--------|-------------------|
| RS0816S  • W 8"  • HT 16"  • EXT 4"  | DYW             | 1,000lm LED (7W)  | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | DYK             | 1,800lm LED (14W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | AHS             | 1-60W A19 (60W)   | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
| RS1020S  • W 10"  • HT 20"  • EXT 5" | DYL             | 1,800lm LED (14W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | DYM             | 3,100lm LED (22W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | AHU             | 2-100W A21 (200W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
| RS1224S  • W 12"  • HT 24"  • EXT 6" | DYO             | 6,300lm LED (40W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | DYN             | 7,100lm LED (44W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |
|                                      | AHX             | 3-100W A21 (300W) | 1       | PC     | WA       | DAC<br>CDA         | WM       | BD     | SIL<br>LOGO<br>BL |

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale


#### Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

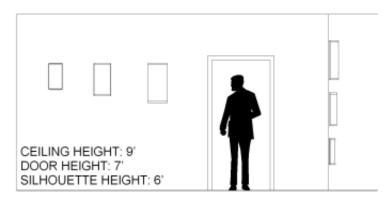

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
   UV stable, white acrylic cylinder diffuser (Standard)
   Optional specialty diffuser materials available
   Energy efficient LED lamping

- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
   Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
   Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| _ |   | _ | _ |   |   |   |   | _ |   |   |    |
|---|---|---|---|---|---|---|---|---|---|---|----|
| D | ľ | r | t | u | S | e | r | Т | ٧ | p | es |

WA Standard Acrylic Diffuser

## Diffuser Accent Types

DAC Diffuser Accent Color CDA Custom Diffuser Accent

## Mountings

Wall Mount WM

#### Louvers

BD **Bottom Perf Door** 

## **Dimming Types**

| 0 | D1 |
|---|----|
| 1 | D2 |
| 2 | DЗ |

#### Options

| SIL  | Silhouette Symbol |
|------|-------------------|
| LOGO | Custom Logo       |
| BL   | Bottom Lens       |
| BD   | Bottom Door       |