



San Francisco Series Wall Sconce

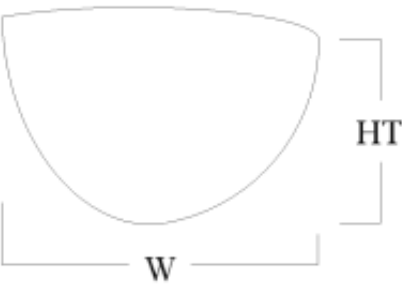

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting
SF1809S • W 18" • HT 9"	EDR	1,400lm LED (11W)	1	PC	WA PA	WM
	ETU	2,000lm LED (16W)	1	PC	WA PA	WM
	BFD	2-100W A21 (200W)	1	PC	WA PA	WM
SF2412S • W 24" • HT 12"	EOJ	2,000lm LED (16W)	1	PC	WA PA	WM
	EVR	2,800lm LED (25W)	1	PC	WA PA	WM
	DWS	2-100W A21 (200W)	1	PC	WA PA	WM
SF3010S • W 30" • HT 10" • EXT 15"	GME	3,600lm LED (27W)	1	PC	WA PA	WM

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED

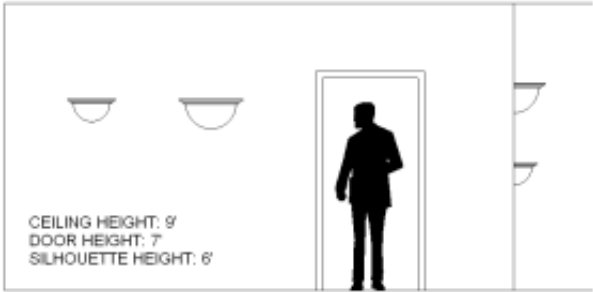

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic bowl diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

PA Premium Acrylic Diffuser

Mountings

WM Wall Mount

Dimming Types

0 D1

1 D2