

Spokane Series 4 Arm Cluster Pendant




SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options					Finish	Hanging	Diffuser	Options	Dimensions	
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit					W	HT
SP5012V	EBW	25,400lm LED (197W)	12,700lm LED (96W)	120/277	2	PC	SS	AD	DM	W	72"
	EBX	38,100lm LED (288W)	12,700lm LED (96W)	120/277	2		MS		FD	HT	17"
	EFE	8-F42TBX (387W)		120/277	1					OAH	3'
	BGE	16-F26TBX (442W)		120/277	1					Y	4 @ 30"x10"
	BGF	16-F32TBX (589W)		120/277	1						
	BGG	16-F42TBX (773W)		120/277	1						
	BGD	16-100A19 (1600W)		120	1						
SP6214V	ECA	25,400lm LED (197W)	12,700lm LED (96W)	120/277	2	PC	SS	AD	DM	W	90"
	DWY	50,800lm LED (389W)	12,700lm LED (96W)	120/277	2		MS		FD	HT	19"
	BGI	32-F26TBX (884W)		120/277	1					OAH	4'
	BGJ	32-F32TBX (1178W)		120/277	1					Y	4 @ 36"x12"
	BGK	32-F42TBX (1546W)		120/277	1						
	BGH	24-100A19 (2400W)		120	1						

Scale

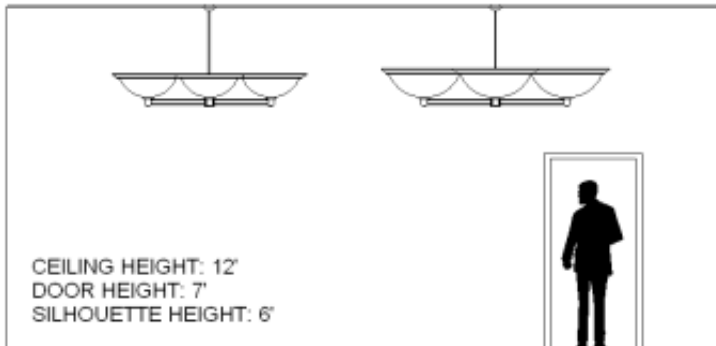

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	Overall Height
Y	Y-Dimension

Lamp Descriptions

100A19	100W A19, medium base
F26TBX	26W triple biax, 4-PIN GX24q-3 base
F32TBX	32W triple biax, 4-PIN GX24q-3 base
F42TBX	42W triple biax, 4-PIN GX24q-4 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Hanging Style

SS	SINGLE STEM
MS	MULTI-STEM

Diffusers

AD	Acrylic (White Acrylic Standard)
----	----------------------------------

Options

DM	Dimming
DIM-010	0-10V four wire control dimming
FD	Frosted Diffuser