

Waycross Series Wall Sconce




SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

| Model | Lamping Options | | | | | | | | | |
|--------------|-----------------|-------------------|---------|---------|--------|----------|---------|------------|-----|-----|
| Model Number | Lamping Code | Body Lamping | Voltage | Circuit | Finish | Diffuser | Options | Dimensions | | |
| WC0816S | DYW | 1,000lm LED (8W) | 120/277 | 1 | PC | AC | BD | W | 11" | |
| | DYK | 2,100lm LED (17W) | 120/277 | 1 | | | | BL | HT | 18" |
| | BPA | 1-F27BX (26W) | 120/277 | 1 | | | | CC | OAH | N/A |
| | AHS | 1-60A19 (60W) | 120 | 1 | | | | DM | EXT | 6" |
| | | | | | | | MC | | | |
| | | | | | | | TC | | | |
| WC1020S | DYL | 2,100lm LED (17W) | 120/277 | 1 | PC | AC | BD | W | 14" | |
| | DYM | 3,100lm LED (24W) | 120/277 | 1 | | | | BL | HT | 22" |
| | BMW | 1-F39BX (39W) | 120/277 | 1 | | | | CC | OAH | N/A |
| | AHU | 2-100A19 (200W) | 120 | 1 | | | | DM | EXT | 7" |
| | | | | | | | MC | | | |
| | | | | | | | TC | | | |
| WC1224S | DYN | 5,600lm LED (44W) | 120/277 | 1 | PC | AC | BD | W | 16" | |
| | DYO | 6,300lm LED (48W) | 120/277 | 1 | | | | BL | HT | 27" |
| | AHY | 2-F39BX (77W) | 120/277 | 1 | | | | CC | OAH | N/A |
| | AHX | 3-100A19 (300W) | 120 | 1 | | | | DM | EXT | 8" |
| | | | | | | | MC | | | |
| | | | | | | | TC | | | |

Scale

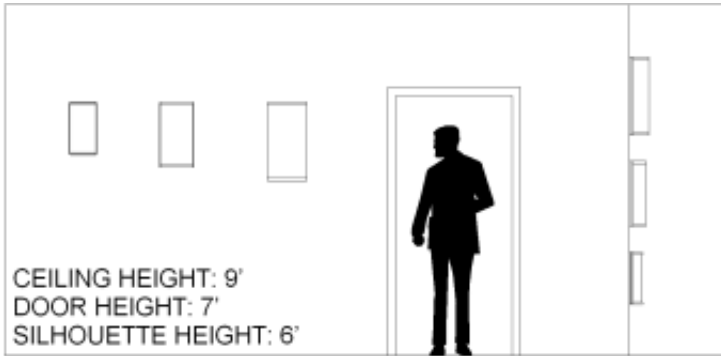

PRODUCT FEATURES

- Fabricated and welded metal housing

Abbreviation Key

Dimensions

| | |
|-----|----------------|
| W | Width |
| HT | Height |
| OAH | Overall Height |
| EXT | Extension |

Lamp Descriptions

| | |
|--------|--------------------------------------|
| 60A19 | 60W A19, medium base |
| 100A19 | 100W A19, medium base |
| F27BX | 27W high lumen biax, 4-PIN 2G11 base |
| F39BX | 39W high lumen biax, 4-PIN 2G11 base |

- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard electrical junction box (by others)
- LED Battery Back-Up Available
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

LED 3000 Kelvin Warm White LED

Finishes

PC Powder Coat

Diffusers

AC White Acrylic Cylinder

Options

DM Dimming
 DIM-010 0-10V four wire control dimming
 BL Bottom Louver
 BD Bottom Diffuser
 MC Modern Cross
 TC Triple Cross
 CC Celtic Cross