Winston Series Ceiling Mount






Model Number	Lamping Body Lan Code	nping	Circuit	Finish	Finish Accent		Mounting	Louver	Options
<pre>WI1007C • W 12 • HT 10</pre>	АНО	2-100W A21 (200W)	1	PC	WT CT	WA	СС	SQ	SIL LOGO
• W 14 • HT 12	GJJ	5,400lm LED (33W)	1	PC	WT CT	WA	CC	SQ	SIL LOGO
	AHQ	3-100W A21 (300W)	1	PC	WT CT	WA	CC	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

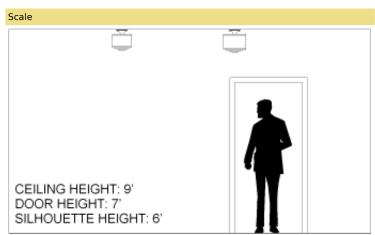

Abbreviation	Кеу				
Lamps					
100W A21	Medium Base, 100W Max, Incandesent or LED				
Finish Types					
PC	Powder Coat				
Finish Accent Types					
WT	Wood Trim				
СТ	Custom Trim				
Diffuser Types					
WA	Standard Acrylic Diffuser				
Mountings					
СС	Ceiling Canopy				
Louvers					
SQ	Square Cell				

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
 Optional specialty diffuser materials available
- Optional specially diffuser materia
 Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability

- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
 Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
 Contact Us for more lamping options.

Dimming Types						
0	D1					
1	D2					
Options						
SIL	Silhouette Symbol					

Custom Logo

LOGO